

# POWERING A NON-STOP INDIA



**Maximum Retail Prices  
For Industrial Signaling Products**  
Effective from 01-06-26

**INDUSTRIAL  
SIGNALING  
PRODUCTS**

# FROM THE COO'S DESK.



Electrical & Automation

Dear Partner,

India is building at a pace and scale that few could have imagined a decade ago. **Infrastructure, metro networks, buildings, green energy corridors, the evolving new energy landscape including solar, modernising factories, and connected homes,** the demand on every link in the electrical and automation value chain has never been greater. It is a privilege to stand at the centre of this transformation, and it is a privilege we share with you.

As we step into this new phase of growth, we are sharing our updated price list. **This revision reflects the investments we continue to make in Made in India manufacturing, R&D, and the service infrastructure that you and your customers rely on every day, across every scale, segment, geography, and across all sources of power.** Our commitment to transparency, quality, and reliability remains the foundation of everything we do together.

At Lauritz Knudsen, we carry over 70+ years of experience built in India, for India. Today, that legacy powers a portfolio spanning **Low Voltage solutions, Industrial Automation, Software and Services,** designed to deliver seamlessly across diverse applications and evolving energy needs. From conventional systems to the rapidly expanding renewable and solar ecosystem, we enable consistent, high performance outcomes that power a **Non Stop India.**

It is your expertise, your relationships, and your reach that turn our solutions into real impact. Every specification advised, every installation completed, every customer served, that is where our shared purpose comes to life. We remain committed to equipping you with the products, training, and support that enable you to deliver with confidence.

As India accelerates toward its Viksit Bharat 2047 vision, the role of reliable, intelligent, and future ready electrical infrastructure has never been more critical. We are ready for what comes next, and we are proud to partner with you on this journey.

Our products and solutions are **built in India and engineered for all.**

**We Listen, We Partner, We Innovate**

A handwritten signature in blue ink, appearing to read 'Naresh Kumar', with a horizontal line underneath.

Warm regards,  
Naresh Kumar  
COO & Sr. VP, Electrical Standard Products  
Lauritz Knudsen Electrical & Automation

# Content

|                                       |    |
|---------------------------------------|----|
| Rotary Switches                       | 01 |
| Load Break Switches                   | 13 |
| Cable Ducts                           | 16 |
| Timing Devices, Supply Monitors & ELR | 21 |
| Modular Remote Control Units          | 29 |

**Note :**

Colour of HSN code signifies below

[Green colour : HSN code]

Current GST 18%, subject to changes as per Govt. notification



# Complete Your Panel with the widest range of Industrial Signaling Products



**Rotary & Load  
Break Switches**



**Modular Remote  
Control Units**



**Timing Devices &  
Supply Monitors**




**Digital Panel  
Meters**





# Increase installation efficiency with our Single Hole Mounting Rotary Switch

Single hole mounting (SHM) range of rotary switches uses a unique mounting concept that requires just a single Ø22.5 cut out to mount the switches on the panel

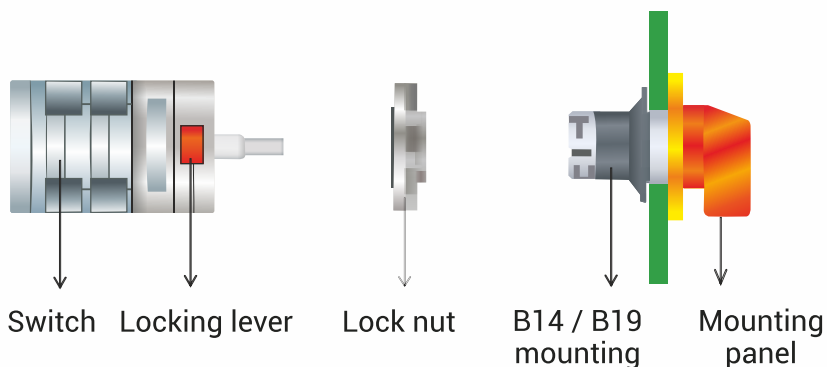


- › Available from 6A-32A with B14 / B19 mounting
- › Easy mounting - Reduces assembly time
- › Wiring accessibility : Switch can be wired separately and then snap fitted to the mounting assembly using locking lever
- › Single hole cutout - It requires a single cutout to mount on the panel

# Rotary Switches

**Note:** All mentioned prices are for Standard Mounting & Knob. Kindly reach our branch offices for details of other mountings & knobs.

## Cam Operated Rotary Switches [8536]




### Isolators Switches (ON-OFF Switches)



| 60°<br>Operation                                                     | 90°<br>Operation | 90°<br>Operation<br>Complete<br>Rotation | Description     | M.R.P. (₹) Per Unit |                |                |                |                |                |                |                 |                 |
|----------------------------------------------------------------------|------------------|------------------------------------------|-----------------|---------------------|----------------|----------------|----------------|----------------|----------------|----------------|-----------------|-----------------|
| Cat. No.: Program Code (First 5 digits), Next 5 digits in () #→<br>↓ |                  |                                          |                 | 6A<br>(SAB13)       | 10A<br>(SBB13) | 16A<br>(SCB03) | 25A<br>(SEB03) | 32A<br>(SFB03) | 40A<br>(SGB03) | 63A<br>(SIB03) | 100A<br>(SKB03) | 200A<br>(SNB03) |
| 61001                                                                | 61191            | 61195                                    |                 | 1 Pole ON - OFF     | 200            | 315            | 450            | 500            | 625            | 845            | 985             | 4660            |
| 61002                                                                | 61192            | 61198                                    | 2 Pole ON - OFF | 255                 | 360            | 515            | 615            | 725            | 1015           | 1260           | 5830            | 7855            |
| 61003 <sup>s</sup>                                                   | -                | -                                        | 3 Pole ON - OFF | 270                 | 435            | 930            | 1165           | 1295           | 1705           | 2445           | 7900            | 10290           |
| -                                                                    | 61199            | 61197                                    |                 | 270                 | 435            | 600            | 810            | 905            | 1180           | 1695           | 7185            | 9805            |
| 61004                                                                | 61194            | 61196                                    | 4 Pole ON - OFF | 340                 | 480            | 650            | 975            | 1050           | 1340           | 2025           | 8315            | 11660           |

**Note :** Offered upto 12 Pole  
\$ Motor Duty Switch (AC-3 Duty)




### Changeover Switches (Local - Remote, Auto - Manual Switches)



| With Center<br>OFF<br>(60°)                                           | With<br>OFF<br>(90°) | Without OFF<br>(90°) with<br>Complete<br>Rotation | Description | M.R.P. (₹ ) Per Unit |                |                |                |                |                |                |                 |                 |
|-----------------------------------------------------------------------|----------------------|---------------------------------------------------|-------------|----------------------|----------------|----------------|----------------|----------------|----------------|----------------|-----------------|-----------------|
| Cat. No.: Program Code (First 5 digits), Next 5 digits in () # ➡<br>↓ |                      |                                                   |             | 6A<br>(SAB13)        | 10A<br>(SBB13) | 16A<br>(SCB03) | 25A<br>(SEB03) | 32A<br>(SFB03) | 40A<br>(SGB03) | 63A<br>(SIB03) | 100A<br>(SKB03) | 200A<br>(SNB03) |
| 61025                                                                 | 61151                | 61037                                             | 1 P 2W      | 255                  | 400            | 570            | 625            | 705            | 985            | 1335           | 6025            | 8715            |
| 61026                                                                 | 61152                | 61038                                             | 2 P 2W      | 340                  | 475            | 650            | 845            | 975            | 1345           | 2025           | 8815            | 13280           |
| 61027                                                                 | 61153                | 61039                                             | 3 P 2W      | 410                  | 590            | 865            | 1275           | 1380           | 1695           | 2715           | 11420           | 16990           |
| 61028                                                                 | 61154                | 61040                                             | 4 P 2W      | 510                  | 690            | 1000           | 1680           | 1765           | 2050           | 3410           | 14425           | 21215           |

## Phase Changeover (PS Series Switches)



| Cat. No.: Program Code (First 5 digits), Next 5 digits in () # →<br>↓ | Description     | M.R.P. (₹) Per Unit |                |                |                |
|-----------------------------------------------------------------------|-----------------|---------------------|----------------|----------------|----------------|
|                                                                       |                 | 25A<br>(PEB03)      | 32A<br>(PFB03) | 40A<br>(PGB03) | 63A<br>(PIB03) |
| 61060                                                                 | 1 P 3W with OFF | 530                 | 650            | 955            | 1075           |

## Phase Changeover in SS enclosure



| Cat. No.        | Description                        | M.R.P. (₹) Per Unit |            |            |            |
|-----------------|------------------------------------|---------------------|------------|------------|------------|
|                 |                                    | 25A<br>(E)          | 32A<br>(F) | 40A<br>(G) | 63A<br>(I) |
| 72347P M17TDYR. | PS Series Switches in SS enclosure | 4385                | 4620       | 6820       | 6990       |


**Note :** Prices are available on request for higher than 4 Pole ON-OFF version.  
Please contact nearest E&A branch office for prices.  
# For complete ordering code, Kindly refer Page No.10



**Secure Every Operation**  
IP-20 Finger-Safe Rotary Switches




### ON - OFF Spring Return Switches




| Description  | Cat. No.: Program Code (First 5 digits), Next 5 digits in () # →<br>↓ | M.R.P. (₹) Per Unit |
|--------------|-----------------------------------------------------------------------|---------------------|
|              |                                                                       | 16A<br>(SCB03)      |
| 1 P ON - OFF | 61351                                                                 | 970                 |
| 2 P ON - OFF | 61352                                                                 | 1020                |
| 3 P ON - OFF | 61353                                                                 | 1160                |
| 4 P ON - OFF | 61354                                                                 | 1360                |

### Double Throw with Spring Return Switches




| Description                | Cat. No.: Program Code (First 5 digits), Next 5 digits in () # →<br>↓ | M.R.P. (₹) Per Unit |
|----------------------------|-----------------------------------------------------------------------|---------------------|
|                            |                                                                       | 16A<br>(SCB03)      |
| 1 P 2W W/OFF Spring Return | 61361                                                                 | 1020                |
| 2 P 2W W/OFF Spring Return | 61362                                                                 | 1510                |
| 3 P 2W W/OFF Spring Return | 61363                                                                 | 1640                |

### One Side Spring Return Switches




| Description                       | Cat. No.: Program Code (First 5 digits), Next 5 digits in () # →<br>↓ | M.R.P. (₹) Per Unit |
|-----------------------------------|-----------------------------------------------------------------------|---------------------|
|                                   |                                                                       | 16A<br>(SCB03)      |
| 1 P 3W Spring Return - OFF from 1 | 61364                                                                 | 930                 |
| 2 P 3W Spring Return - OFF from 1 | 61365                                                                 | 1360                |
| 3 P 3W Spring Return - OFF from 1 | 61369                                                                 | 1495                |

### Spring Return Switches without OFF



| Description                        | Cat. No.: Program Code (First 5 digits), Next 5 digits in () # →<br>↓ | M.R.P. (₹) Per Unit |
|------------------------------------|-----------------------------------------------------------------------|---------------------|
|                                    |                                                                       | 16A<br>(SCB03)      |
| 1 P 2W Spring Return - from 2 to 1 | 61371                                                                 | 930                 |
| 2 P 2W Spring Return - from 2 to 1 | 61372                                                                 | 1360                |
| 3 P 2W Spring Return - from 2 to 1 | 61373                                                                 | 1495                |

### Start Stop Spring Return Switches




| Description                  | Cat. No.: Program Code (First 5 digits), Next 5 digits in () # →<br>↓ | M.R.P. (₹) Per Unit |
|------------------------------|-----------------------------------------------------------------------|---------------------|
|                              |                                                                       | 16A<br>(SCB03)      |
| 1 P Start Stop Spring Return | 61300                                                                 | 1160                |
| 2 P Start Stop Spring Return | 61388                                                                 | 1360                |

**Note:** Prices for 25A rating are available on request.  
# For complete ordering code, kindly refer Page No. 10




## Multi Step Switches with OFF




3 Way

| Description | Cat. No.<br># | M.R.P. (₹) Per Unit |                |                |                                       |                |                |                |                 |                 |
|-------------|---------------|---------------------|----------------|----------------|---------------------------------------|----------------|----------------|----------------|-----------------|-----------------|
|             |               | 6A<br>(SAB13)       | 10A<br>(SBB13) | 16A<br>(SCB03) | 25A<br>(SEB03)                        | 32A<br>(SFB03) | 40A<br>(SGB03) | 63A<br>(SIB03) | 100A<br>(SKB03) | 200A<br>(SNB03) |
| 1 P 3W      | 61060         | 295                 | 455            | 595            | PS Series Switches (Refer page no. 2) |                |                |                | 6120            | 9300            |
| 2 P 3W      | 61080         | 410                 | 525            | 720            | 1010                                  | 1080           | 1640           | 1845           | 9000            | 14220           |
| 3 P 3W      | 61100         | 595                 | 705            | 1230           | 1495                                  | 1630           | 2190           | 2850           | 11750           | 18675           |
| 4 P 3W      | 61131         | 760                 | 915            | 1495           | 1870                                  | 2045           | 2930           | 3430           | 14845           | 23415           |




4 Way

|        |       |     |      |      |      |      |      |      |       |       |  |
|--------|-------|-----|------|------|------|------|------|------|-------|-------|--|
| 1 P 4W | 61061 | 350 | 410  | 865  | 1060 | 1170 | 1395 | 1900 | 8610  | ***   |  |
| 2 P 4W | 61081 | 595 | 755  | 1020 | 1110 | 1295 | 2005 | 2225 | 14425 | ***   |  |
| 3 P 4W | 61101 | 820 | 960  | 1615 | 1870 | 2145 | 2555 | 3430 | 21740 | 28080 |  |
| 4 P 4W | 61132 | 995 | 1410 | 2060 | 2240 | 2390 | 3320 | 3950 | 30510 | 45765 |  |




5 Way

|        |       |     |      |      |      |      |      |      |       |       |  |
|--------|-------|-----|------|------|------|------|------|------|-------|-------|--|
| 1 P 5W | 61062 | 380 | 530  | 915  | 1320 | 1335 | 1440 | 2045 | ***   | 17475 |  |
| 2 P 5W | 61082 | 690 | 995  | 1325 | 1800 | 2120 | 2280 | 2855 | ***   | ***   |  |
| 3 P 5W | 61102 | 915 | 1815 | 2300 | 2550 | 2815 | 3295 | 3870 | 28945 | ***   |  |




6 Way

|        |       |      |     |      |      |      |      |      |     |     |  |
|--------|-------|------|-----|------|------|------|------|------|-----|-----|--|
| 1 P 6W | 61063 | 500  | 660 | 960  | 1330 | 1360 | 1485 | 2270 | *** | *** |  |
| 2 P 6W | 61083 | 820  | *** | 1410 | 2095 | 2430 | ***  | 4785 | *** | *** |  |
| 3 P 6W | 61103 | 1145 | *** | 2645 | 3005 | 3240 | ***  | ***  | *** | *** |  |




7 Way

|        |       |      |     |      |      |      |      |      |     |     |  |
|--------|-------|------|-----|------|------|------|------|------|-----|-----|--|
| 1 P 7W | 61064 | 510  | 745 | 1040 | 1335 | 1410 | 1540 | 2385 | *** | *** |  |
| 2 P 7W | 61084 | 860  | *** | 1375 | 2105 | 2240 | 3265 | 3775 | *** | *** |  |
| 3 P 7W | 61104 | 1195 | *** | 2230 | 2770 | ***  | 4450 | 5245 | *** | *** |  |




8 Way

|        |       |     |     |      |      |      |      |      |     |     |  |
|--------|-------|-----|-----|------|------|------|------|------|-----|-----|--|
| 1 P 8W | 61065 | 580 | 810 | 1030 | 1835 | 2055 | 2430 | 3935 | *** | *** |  |
| 2 P 8W | 61085 | 940 | *** | 1880 | ***  | ***  | ***  | ***  | *** | *** |  |




9 Way

|        |       |      |     |      |     |     |     |     |     |     |  |
|--------|-------|------|-----|------|-----|-----|-----|-----|-----|-----|--|
| 1 P 9W | 61066 | 595  | *** | ***  | *** | *** | *** | *** | *** | *** |  |
| 2 P 9W | 61086 | 1065 | *** | 2765 | *** | *** | *** | *** | *** | *** |  |



10 Way

|         |       |      |     |      |      |     |     |     |     |     |  |
|---------|-------|------|-----|------|------|-----|-----|-----|-----|-----|--|
| 1 P 10W | 61067 | 690  | 985 | 1450 | 3140 | *** | *** | *** | *** | *** |  |
| 2 P 10W | 61087 | 1105 | *** | ***  | ***  | *** | *** | *** | *** | *** |  |




11 Way

|         |       |      |     |      |      |     |     |     |     |     |  |
|---------|-------|------|-----|------|------|-----|-----|-----|-----|-----|--|
| 1 P 11W | 61068 | 820  | *** | 1315 | 3435 | *** | *** | *** | *** | *** |  |
| 2 P 11W | 61088 | 1250 | *** | ***  | ***  | *** | *** | *** | *** | *** |  |

\*\*\*Prices are available on request.


# Program Code first 5 digits, Next 5 digits in (), For complete ordering code, kindly refer Page No.10

## Multi Step Switches without OFF




3 Way

| Description    | Cat. No. # | M.R.P. (₹) Per Unit |             |             |             |             |             |             |              |              |
|----------------|------------|---------------------|-------------|-------------|-------------|-------------|-------------|-------------|--------------|--------------|
|                |            | 6A (SAB13)          | 10A (SBB13) | 16A (SCB03) | 25A (SEB03) | 32A (SFB03) | 40A (SGB03) | 63A (SIB03) | 100A (SKB03) | 200A (SNB03) |
| 1 P 3W W/O OFF | 61049      | 280                 | 435         | 610         | 775         | 810         | 1310        | 1480        | ***          | 9440         |
| 2 P 3W W/O OFF | 61069      | 410                 | 655         | 850         | 1025        | 1540        | 1640        | 1930        | 9000         | 16990        |
| 3 P 3W W/O OFF | 61089      | 595                 | 810         | 1270        | 1495        | 1630        | 2190        | 2850        | 11750        | 18850        |
| 4 P 3W W/O OFF | 61120      | 760                 | 915         | 1475        | 1905        | 2025        | 4665        | 5155        | ***          | 24435        |




4 Way

|                |       |     |     |      |      |      |      |      |       |       |
|----------------|-------|-----|-----|------|------|------|------|------|-------|-------|
| 1 P 4W W/O OFF | 61050 | 310 | 470 | 725  | 935  | 975  | 1430 | 1980 | 6120  | 9645  |
| 2 P 4W W/O OFF | 61070 | 460 | 710 | 865  | 1100 | 1215 | 1710 | 2225 | 9460  | 15275 |
| 3 P 4W W/O OFF | 61090 | 635 | 755 | 1375 | 1765 | 1955 | 2235 | 2995 | 12460 | 20595 |
| 4 P 4W W/O OFF | 61121 | 880 | 990 | 1605 | 2130 | 2270 | 2995 | 3990 | 15310 | 26065 |




5 Way

|                |       |     |      |      |      |      |      |      |      |       |
|----------------|-------|-----|------|------|------|------|------|------|------|-------|
| 1 P 5W W/O OFF | 61051 | 380 | 485  | 795  | 1050 | 1295 | ***  | 2045 | 7860 | ***   |
| 2 P 5W W/O OFF | 61071 | 690 | 885  | 1105 | 1685 | 2120 | ***  | ***  | ***  | 19355 |
| 3 P 5W W/O OFF | 61091 | 915 | 1815 | 2105 | 2310 | 2535 | 2820 | 3980 | ***  | 24610 |




6 Way

|                |       |     |      |      |      |      |      |      |       |       |
|----------------|-------|-----|------|------|------|------|------|------|-------|-------|
| 1 P 6W W/O OFF | 61052 | 400 | 795  | 875  | 1170 | 1335 | 1650 | 2090 | 9000  | 17625 |
| 2 P 6W W/O OFF | 61072 | 805 | 935  | 1330 | 2090 | 2150 | 2280 | 2915 | 17935 | 23060 |
| 3 P 6W W/O OFF | 61092 | 975 | 1705 | 2260 | 2495 | 2590 | 2980 | 3980 | 30510 | 48230 |




7 Way

|                |       |      |     |      |      |     |     |      |       |     |
|----------------|-------|------|-----|------|------|-----|-----|------|-------|-----|
| 1 P 7W W/O OFF | 61053 | 500  | 745 | 965  | 1385 | *** | *** | ***  | 15860 | *** |
| 2 P 7W W/O OFF | 61073 | 860  | *** | 1495 | 2130 | *** | *** | 4445 | ***   | *** |
| 3 P 7W W/O OFF | 61093 | 1195 | *** | 2470 | 3235 | *** | *** | 5355 | ***   | *** |




8 Way

|                |       |      |      |      |      |      |      |      |       |     |
|----------------|-------|------|------|------|------|------|------|------|-------|-----|
| 1 P 8W W/O OFF | 61054 | 510  | 875  | 1120 | 1410 | 1480 | 1715 | 2520 | 15070 | *** |
| 2 P 8W W/O OFF | 61074 | 910  | 1395 | 1880 | 2225 | 2410 | ***  | 4875 | ***   | *** |
| 3 P 8W W/O OFF | 61094 | 1275 | ***  | 2690 | 2900 | 2965 | 3560 | 5625 | ***   | *** |




9 Way

|                |       |      |     |      |     |     |     |     |     |     |
|----------------|-------|------|-----|------|-----|-----|-----|-----|-----|-----|
| 1 P 9W W/O OFF | 61055 | 595  | *** | 1315 | *** | *** | *** | *** | *** | *** |
| 2 P 9W W/O OFF | 61075 | 1005 | *** | 1870 | *** | *** | *** | *** | *** | *** |




10 Way

|                 |       |      |     |      |     |     |     |     |     |     |
|-----------------|-------|------|-----|------|-----|-----|-----|-----|-----|-----|
| 1 P 10W W/O OFF | 61056 | 640  | 940 | 1400 | *** | *** | *** | *** | *** | *** |
| 2 P 10W W/O OFF | 61076 | 1120 | *** | ***  | *** | *** | *** | *** | *** | *** |



11 Way

|                 |       |      |     |     |     |     |     |     |     |     |
|-----------------|-------|------|-----|-----|-----|-----|-----|-----|-----|-----|
| 1 P 11W W/O OFF | 61057 | 1185 | *** | *** | *** | *** | *** | *** | *** | *** |
| 2 P 11W W/O OFF | 61077 | 1345 | *** | *** | *** | *** | *** | *** | *** | *** |



12 Way

|                 |       |      |     |      |      |      |     |      |     |     |
|-----------------|-------|------|-----|------|------|------|-----|------|-----|-----|
| 1 P 12W W/O OFF | 61058 | 1245 | *** | 1475 | 3550 | 3780 | *** | 4990 | *** | *** |
| 2 P 12W W/O OFF | 61078 | 1460 | *** | 4405 | ***  | ***  | *** | ***  | *** | *** |



\*\*\*Prices are available on request.

# Program Code first 5 digits, Next 5 digits in (), For complete ordering code, kindly refer Page No.10






### Ammeter Selector Switches (ASS)




| Description                         | Cat. No.        | Amps | M.R.P. (₹) Per Unit |
|-------------------------------------|-----------------|------|---------------------|
| Line Currents with OFF with CT      | 61325 SAB13TDYR | 6A   | 410                 |
| Line Currents with OFF with CT      | 61325 SBB13TDYR | 10A  | 425                 |
| Line Currents with OFF with CT      | 61325 SCB03TDYR | 16A  | 645                 |
| Line Currents with OFF without CT   | 71000 SCB03TDYR | 16A  | 1975                |
| Direct Currents with OFF without CT | 71000 SEB03TDYR | 25A  | 2350                |
| Direct Currents with OFF without CT | 71000 SFB03TDYR | 32A  | 2820                |
| Direct Currents with OFF without CT | 71000 SGB03TDYR | 40A  | 4970                |
| Direct Currents with OFF without CT | 71000 SIB03TDYR | 63A  | 5245                |


### Voltmeter Selector Switches (VSS)




| Description                     | Cat. No.        | Amps | M.R.P. (₹) Per Unit |
|---------------------------------|-----------------|------|---------------------|
| Voltage between Phases with OFF | 61312 SAB13TDYR | 6A   | 300                 |
| Voltage between Phases with OFF | 61312 SBB13TDYR | 10A  | 390                 |
| Voltage between Phases with OFF | 61312 SCB03TDYR | 16A  | 575                 |



| Description                                                    | Cat. No.        | Amps | M.R.P. (₹) Per Unit |
|----------------------------------------------------------------|-----------------|------|---------------------|
| Voltage between Phases & Individual Phases to Neutral with OFF | 61313 SAB13TDYR | 6A   | 540                 |
| Voltage between Phases & Individual Phases to Neutral with OFF | 61313 SBB13TDYR | 10A  | 755                 |
| Voltage between Phases & Individual Phases to Neutral with OFF | 61313 SCB03TDYR | 16A  | 1085                |




| Description                                          | Cat. No.        | Amps | M.R.P. (₹) Per Unit |
|------------------------------------------------------|-----------------|------|---------------------|
| Voltage between Phase & Phase to Neutral without OFF | 61314 SBB13TDYR | 10A  | 755                 |



| Description                                          | Cat. No.        | Amps | M.R.P. (₹) Per Unit |
|------------------------------------------------------|-----------------|------|---------------------|
| Voltage between Phase & Phase to Neutral without OFF | 61311 SAB13TDYR | 6A   | 505                 |

### Ammeter & Voltmeter Combined Switch



| Description                                               | Cat. No.        | Amps | M.R.P. (₹) Per Unit |
|-----------------------------------------------------------|-----------------|------|---------------------|
| Voltage between Phases to Neutral & Current of that Phase | 61338 SBB13TDYR | 10A  | 795                 |




**Control your breaker remotely  
through TNC Switch**

## **Breaker Control Switches (Trip-Neutral-Close)**

- › 1NO+1NO, 2NO+2NC model available in 25A
- › Barrel lock option available
- › Spring return from both side to center
- › Lost motion contact (LMD)& Sequence Locking available




## Breaker Control Switches (Trip - Neutral - Close)

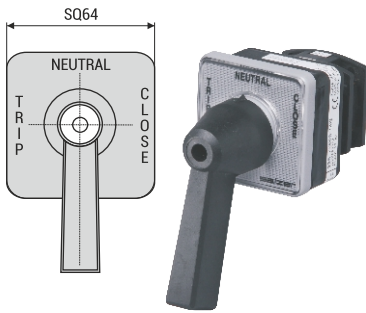

| Rating | Contact Arrangement | Mounting Type | Cat. No.       | M.R.P. (₹) Per Unit |
|--------|---------------------|---------------|----------------|---------------------|
| 25A    | 1Trip + 1Close      | Standard      | 73257SEB03PGBB | 1505                |
| 25A    | 1Trip + 1Close      | Standard      | 73257SEB03PGYR | 1505                |
| 25A    | 1Trip + 1Close      | Standard      | 73257SEB03PGBB | 1505                |
| 25A    | 1Trip + 1Close      | Barrel Lock   | 73257SEB90PGBB | 2185                |
| 25A    | 2Trip + 2Close      | Standard      | 72009SEB03PGBB | 1765                |
| 25A    | 2Trip + 2Close      | Standard      | 72009SEB03PGYR | 1765                |
| 25A    | 2Trip + 2Close      | Standard      | 72009SEB03PGBB | 1765                |
| 25A    | 2Trip + 2Close      | Barrel Lock   | 72009SEB90PGBB | 2715                |

Other option such as sequence inter lock (SIL) & lost motion device (LMD) available on request.

## Motor Duty Switches

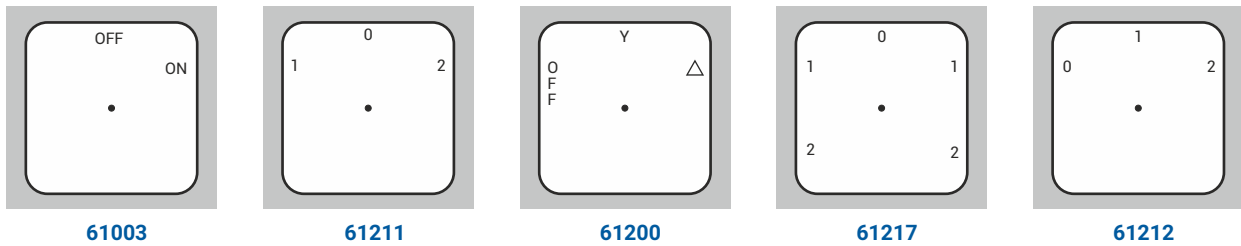


| Description                        | Cat. No. # | M.R.P. (₹) Per Unit |             |             |             |             |              |              |
|------------------------------------|------------|---------------------|-------------|-------------|-------------|-------------|--------------|--------------|
|                                    |            | 16A (SCB03)         | 25A (SEB03) | 32A (SFB03) | 40A (SGB03) | 63A (SIB03) | 100A (SKB03) | 200A (SNB03) |
| ON - OFF Switch                    | 61003      | 930                 | 1165        | 1295        | 1705        | 2445        | 7900         | 10290        |
| FOR - OFF - REV Switch             | 61211      | 700                 | 865         | 1025        | 2810        | 3430        | 7870         | 12690        |
| Star - Delta Switch                | 61200      | 930                 | 1225        | 1535        | 2470        | 3160        | ***          | ***          |
| 2 Speed for FOR - OFF - REV Switch | 61217      | ***                 | 2220        | ***         | 3990        | ***         | ***          | ***          |
| 2 Speed forward Switch             | 61212      | 1020                | 2020        | 2530        | 3330        | 4090        | 9845         | 11370        |

^ Supplied only with ball grip handle

# Program Code first 5 digits, Next 5 digits in ( ), For complete ordering code, kindly refer Page No.10

## Switches in Enclosure

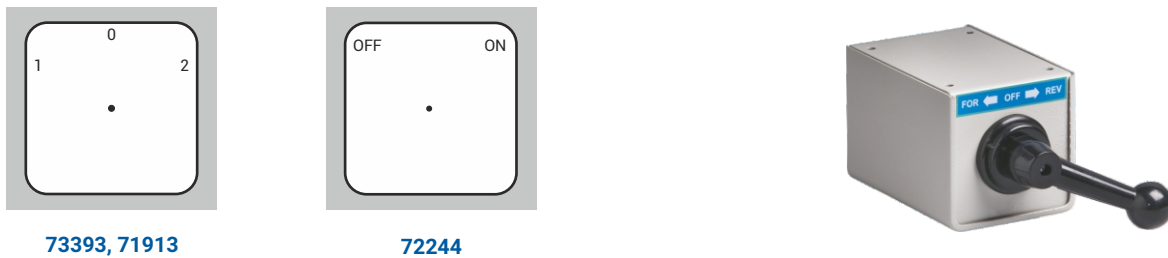


| Description                                 | Cat. No.       | Amps | M.R.P. (₹) Per Unit |
|---------------------------------------------|----------------|------|---------------------|
| FOR - OFF - Rev in SS with ball grip handle | 73393SCM17BGXB | 16A  | 995                 |
| FOR - OFF - Rev in SS with ball grip handle | 71913SEM17BGYR | 25A  | 1515                |
| FOR - OFF - Rev in SS with ball grip handle | 71913SFM17BGYR | 32A  | 2085                |
| 3 Pole ON - OFF in SS                       | 72244SEM17TDYR | 25A  | 1315                |
| 3 Pole ON - OFF in SS                       | 72244SFM17TDYR | 32A  | 1800                |
| 3 Pole 2Way Without OFF in SS               | 61153SCM17TDYR | 16A  | 1430                |

For any other rating requirement please contact nearest E&A branch office

## Rotary Switch Accessories [8538]

### Front Plate Assembly




| Description                | Cat. No.  | Size    | M.R.P. (₹) Per Unit |
|----------------------------|-----------|---------|---------------------|
| Front Plate for 6 to 16A   | FP16SQ48  | 48 x 48 | 50                  |
| Front Plate for 25 & 32A   | FP32SQ64  | 64 x 64 | 105                 |
| Front Plate for 40 to 200A | FP200SQ88 | 88 x 88 | 150                 |



### Handles & Knobs

| Description                | Cat. No. | Size               | M.R.P. (₹) Per Unit |
|----------------------------|----------|--------------------|---------------------|
| Flag Handle for 16A        | KNFHS2   | 48 x 48, 48 x 60   | 30                  |
| Flag Handle for 25 - 32A   | KNFHS3   | 64 x 64, 64 x 80   | 50                  |
| Ball Handle for 16 - 32A   | HNBHS1   | 64 x 64, 64 x 80   | 140                 |
| Ball Handle for 40 - 63A   | HNBHS2   | 88 x 88, 104 x 104 | 150                 |
| PG Handle for 16 - 32A     | HNPGS1   | 64 x 64, 64 x 80   | 170                 |
| Lever Handle for 40 - 200A | HNLVS1   | 88 x 88, 104 x 104 | 220                 |
| Tear Drop for 6 - 16A      | KNTDS1   | 48 x 48, 48 x 60   | 30                  |
| Tear Drop for 16 - 32A     | KNTDS2   | 64 x 64, 64 x 80   | 50                  |
| Tear Drop for 40 - 400A    | KNTDS3   | 88 x 88, 104 x 104 | 110                 |

### Special Front Plate Assembly



| Description                 | Cat. No. | Size    | M.R.P. (₹) Per Unit |
|-----------------------------|----------|---------|---------------------|
| SPL IND Plates upto 16A     | FPRT4860 | 48 x 60 | 105                 |
| SPL IND Plates for 16 - 32A | FPRT6480 | 64 x 80 | 170                 |

### Script Plate (marking plate)

| Description                | Cat. No. | Size    | M.R.P. (₹) Per Unit |
|----------------------------|----------|---------|---------------------|
| Script Plate for 6 - 16A   | SPSQ48   | 48 x 48 | 30                  |
| Script Plate for 16 - 32A  | SPSQ64   | 64 x 64 | 35                  |
| Script Plate for 40 - 200A | SPSQ88   | 88 x 88 | 40                  |
| Script Plate for 6 - 16A   | SPRT4816 | 48 x 16 | 10                  |
| Script Plate for 6 - 32A   | SPRT6416 | 64 x 16 | 20                  |

### Mounting Plates (used for Back Fixing Plate)

| Description                  | Cat. No. | Size      | M.R.P. (₹) Per Unit |
|------------------------------|----------|-----------|---------------------|
| Rear MTG Plate for 6 - 16A   | MPSQ48   | 48 x 48   | 20                  |
| Rear MTG Plate for 25 - 32A  | MPSQ64   | 64 x 64   | 35                  |
| Rear MTG Plate for 40 - 63A  | MPSQ88   | 88 x 88   | 95                  |
| Rear MTG Plate for 80 - 400A | MPSQ104  | 104 x 104 | 170                 |
| DIN Rail Attachment upto 32A | B21DIN35 | -         | 150                 |

### Wall Type Mounting Boxes (upto 32A - maximum 4 Contacts)

| Description                                                     | Cat. No. | M.R.P. (₹) Per Unit |
|-----------------------------------------------------------------|----------|---------------------|
| Plastic / ABS Enclosure B17 16A upto 3 Stage / 25A upto 2 Stage | WMBABS   | 1060                |
| Aluminium Enclosure B17 16A upto 3 Stage / 25A upto 2 Stage     | WMBAL    | 1750                |
| SS Enclosure M17 upto 32A - 4 Stage                             | WMBSS    | 655                 |



B31 PVC Enclosure

**Note :** Switches to be order separately.

### Shrouding Cover (maximum 6 Contacts Round Type)

| Description                                                                | Cat. No. | M.R.P. (₹) Per Unit |
|----------------------------------------------------------------------------|----------|---------------------|
| Shrouding Cover for 6 - 10A                                                | SHCS1    | 110                 |
| Shrouding Cover for 16A                                                    | SHCS2    | 110                 |
| Shrouding Cover for 25 - 32A                                               | SHCS3    | 155                 |
| Shrouding Cover for 40 - 63A                                               | SHCS4    | 170                 |
| Special Cover for Extended Termination 80 - 400A (maximum 2 Contact Stage) | SHCS5    | 1270                |



## Ordering Code for Rotary Switches

| Example for :   | 1. Programme Code | 2. Type | 3. Ampere | 4. Mounting | 5. Knob | 6. Colour |
|-----------------|-------------------|---------|-----------|-------------|---------|-----------|
| 25A 3 Pole      |                   |         |           |             |         |           |
| ON - OFF Switch | 6                 | 1       | 1         | 9           | 7       | S         |
|                 |                   |         |           |             |         | E         |
|                 |                   |         |           |             |         | B         |
|                 |                   |         |           |             |         | 0         |
|                 |                   |         |           |             |         | 3         |
|                 |                   |         |           |             |         | T         |
|                 |                   |         |           |             |         | D         |
|                 |                   |         |           |             |         | Y         |
|                 |                   |         |           |             |         | R         |

### 1. Programme Code

| Programme                      | Programme Code |
|--------------------------------|----------------|
| Isolators                      | Pg. No. 1      |
| Changeovers Switches           | Pg. No. 1      |
| Phase Changeovers Switches     | Pg. No. 2      |
| Spring Return Switches         | Pg. No. 3      |
| Multistep Switches with OFF    | Pg. No. 4      |
| Multistep Switches without OFF | Pg. No. 5      |
| Instrumentation Switches       | Pg. No. 6      |
| Motor Control Switches         | Pg. No. 8      |
| Switches in SS Enclosure       | Pg. No. 8      |
| Breaker Control Switches       | Pg. No. 8      |

### 2. Type Selection

| Type                                                      | Code |
|-----------------------------------------------------------|------|
| S-Series (6 to 400A)                                      | S    |
| Touch Proof (6 to 16A)                                    | T    |
| Rear Access Termination (16 to 63A)                       | R    |
| Phase Selector Only for 1 Pole 3 Way with OFF (25 to 63A) | P    |
| DC Switches (16 to 500A)                                  | D    |





S Series  
Open Version

TP Series  
Touch Proof

RT Series  
Touch Proof &  
Rear Termination

### 3. Ampere Selection

| Ampere | Code | Ampere | Code |
|--------|------|--------|------|
| 6      | A    | 100    | K    |
| 10     | B    | 125    | L    |
| 16     | C    | 160    | M    |
| 20     | D    | 200    | N    |
| 25     | E    | 250    | O    |
| 32     | F    | 300    | P    |
| 40     | G    | 400    | Q    |
| 50     | H    | 500    | R    |
| 63     | I    | 600    | S    |
| 80     | J    | 800    | T    |

## 4. Mounting Style

|                                                                                                                           |                                                                                                                              |                                                                                                                         |                                                                                                                          |                                                                                                                                          |
|---------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| <br><b>B03/B13</b><br>Standard Mounting | <br><b>B19/B14</b><br>Single Hole Mounting | <br><b>B33</b><br>Round Padlock       | <br><b>B30</b><br>Rectangular Padlock | <br><b>B63</b><br>Key Lockable Type                  |
| <br><b>B17</b><br>ABS Enclosure        | <br><b>M17</b><br>Metal Enclosure         | <br><b>B02</b><br>Rear/Base Mounting | <br><b>B21</b><br>DIN Rail Mounting  | <br><b>B42</b><br>Rear Mounting with Door Interlock |

## 5. Knob / Handle Selection

| Code - TD                                                                           | Code - FH                                                                           | Code - PG                                                                           | Code - BG                                                                           | Code - LV                                                                           |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |  |
| Tear Drop                                                                           | Flag Knob                                                                           | Pistol Grip                                                                         | Ball Grip                                                                           | Lever Handle                                                                        |

## 6. Color Combination Selection Table

| Code - YR                                                                           | Code - GB                                                                           | Code - BB                                                                           | Code - AB                                                                           |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |
| Yellow Front Plate<br>Red Knob                                                      | Grey Front Plate<br>Black Knob                                                      | Black Front Plate<br>Black Knob                                                     | Aluminum Foil with<br>Black Knob                                                    |

## Front Plate

| Standard Style               | Frame Size                                                                            | Bigger Style         |
|------------------------------|---------------------------------------------------------------------------------------|----------------------|
| Current Ratings<br>6/10 Amps |  | Current Ratings<br>— |
| 16/20 Amps                   |  | 6/10 Amps            |
| 25/32 Amps                   |  | 16/20 Amps           |
| S40 Amps<br>& above          |  | 25/32 Amps           |
| —                            |  | S40 Amps<br>& above  |

**Note :** 1. For ratings of 6/10A, standard mounting style is B13  
2. Single hole mounting equivalent of B03 is B19 and B13 is B14.

## Mounting Feasibility

| Mounting Code | Description                                                                                  | Feasibility |        |        |        |             |          |
|---------------|----------------------------------------------------------------------------------------------|-------------|--------|--------|--------|-------------|----------|
|               |                                                                                              | 6/10A       | 16/20A | 25/32A | 40/63A | 80/100/125A | 200/400A |
| B03           | Front Mounting, Standard Mounting plate                                                      |             | ✓      | ✓      | ✓      | ✓           | ✓        |
| B13           | Front Mounting with next size plate                                                          | ✓           | ✓      | ✓      | ✓      | ✓           | ✓        |
| B00           | Front Mounting 48 x 48 plate for 25/32A and 64 x 64 plate for 40/63A                         |             |        | ✓      | ✓      |             |          |
| B19           | Single Hole Mounting 32 x 32 plate for 6/10A only 48 x 48 Plate for 16-32A                   | ✓           | ✓      | ✓      |        |             |          |
| B14           | Single Hole Mounting 48 x 48 plate for 6/10A                                                 | ✓           |        |        |        |             |          |
| B33           | Front Mounting with Round Padlock for 2 Position (for Isolators)                             |             | ✓      | ✓      | ✓      | ✓           | ✓        |
| B30           | Front Mounting with Rectangular Padlock 2 Position (for Isolators)                           |             | ✓      | ✓      | ✓      | ✓           | ✓        |
| B63           | Key Lockable type (Handle/Knob)                                                              |             | ✓      | ✓      | ✓      |             |          |
| B90           | Center Key Lock (Pistol grip Handle in black color only)                                     |             | ✓      | ✓      |        |             |          |
| B02           | Rear / (Back/Base) Mounting                                                                  | ✓           | ✓      | ✓      | ✓      | ✓           | ✓        |
| B21           | DIN Rail Mounting on 35 mm Rail 6-32 Amps                                                    | ✓           | ✓      | ✓      |        |             |          |
| B32           | Rear / Base Mounting, Door Interlock + Rectangular Padlock (B30+B42)Base                     |             | ✓      | ✓      | ✓      | ✓           | ✓        |
| B34           | Rear / Base Mounting Door Interlock + Round Padlock (B33+B42)                                |             | ✓      | ✓      | ✓      | ✓           | ✓        |
| B41           | Rear Mounting with Clutch Mechanism on Door<br>(Door Open in all position without Interlock) |             | ✓      | ✓      | ✓      | ✓           | ✓        |
| B42           | Rear Mounting with Interlock Mechanism on Door                                               |             | ✓      | ✓      | ✓      | ✓           | ✓        |
| F47           | Door Clutch, Mounting Plate at front                                                         |             | ✓      | ✓      | ✓      | ✓           | ✓        |
| B17           | ABS Enclosure <b>Max stages</b>                                                              | upto 4      | upto 3 | upto 5 | upto 5 |             |          |
| B31           | ABS Enclosure with Round Padlock (B33+B17) <b>Max stages</b>                                 |             | upto 2 | upto 2 | upto 2 |             |          |
| M17           | Metal Enclosure <b>Max stages</b>                                                            | upto 4      | upto 4 | upto 3 |        |             |          |
| A17           | Aluminium Enclosure <b>Max stages</b>                                                        | upto 4      | upto 3 | upto 2 |        |             |          |
| B40           | Single Hole Mounting with Padlock 48 x 48 Plate For 16-32A                                   |             | ✓      | ✓      |        |             |          |
| B43           | Single Hole Mounting with Center key 48 x 48 Plate for 16-32A                                |             | ✓      | ✓      |        |             |          |
| B45           | Single Hole Mounting with Round Ring with Knob 16A-32A                                       |             | ✓      | ✓      |        |             |          |

## DC Switches

- › Available from 16A to 500A
- › Used for railway coaches lighting & fan circuits switching, all DC power circuits - Railways, Telecommunications & Power plants, Battery charging equipment
- › Please contact nearest branch office for prices



## 3 Pole EB - GEN Changeover Switches



B13 Mounting

| Description                           | Cat. No.           | M.R.P. (₹) Per Unit |            |            |            |            |             |             |
|---------------------------------------|--------------------|---------------------|------------|------------|------------|------------|-------------|-------------|
|                                       |                    | 25A<br>(E)          | 32A<br>(F) | 40A<br>(G) | 63A<br>(I) | 80A<br>(J) | 100A<br>(K) | 125A<br>(L) |
| 3 Pole C/O Front Panel Mounting       | EBX31153B13BGYR    | 3104                | 3233       | 3771       | 3924       | *          | *           | *           |
| 3 Pole C/O Rear Mounting              | EBX31153MB42BGYR   | 3602                | 3732       | 4344       | 4480       | 8007       | 10018       | 12514       |
| 3 Pole C/O in SS Enclosure            | EBX31153SB31BGYR   | 4306                | 4424       | 5120       | 5272       | *          | *           | *           |
| 3 Pole C/O Rear Mounting              | EBX31153B21BGYR    | 3602                | 3732       | 4344       | 4480       | 8007       | 10018       | 12514       |
| 3 Pole C/O Rear Mounting              | EBX31153MB34LHGB   | 3602                | 3732       | 4344       | 4480       | 8007       | 10018       | 12514       |
| 3 Pole C/O in Polycarbonate Enclosure | EBX31153B31LBGYR   | 4306                | 4424       | 5120       | 5272       | *          | *           | *           |
| 3 Pole C/O in SS Enclosure            | EBX31153SB31XLLHYR | *                   | *          | *          | *          | 11315      | 13312       | 15808       |

## 4 Pole EB - GEN Changeover Switches



MB42 Mounting

| Description                           | Cat. No.           | M.R.P. (₹) Per Unit |            |            |            |            |             |             |
|---------------------------------------|--------------------|---------------------|------------|------------|------------|------------|-------------|-------------|
|                                       |                    | 25A<br>(E)          | 32A<br>(F) | 40A<br>(G) | 63A<br>(I) | 80A<br>(J) | 100A<br>(K) | 125A<br>(L) |
| 4 Pole C/O Front Panel Mounting       | EBX31154B13BGYR    | 3602                | 3732       | 4424       | 4552       | *          | *           | *           |
| 4 Pole C/O Rear Mounting              | EBX31154MB42BGYR   | 4057                | 4213       | 4975       | 5199       | 10098      | 12636       | 15785       |
| 4 Pole C/O in SS Enclosure            | EBX31154SB31BGYR   | 4801                | 4988       | 5785       | 5990       | *          | *           | *           |
| 4 Pole C/O Rear Mounting              | EBX31154B21BGYR    | 4057                | 4213       | 4975       | 5179       | 10098      | 12636       | 15785       |
| 4 Pole C/O Rear Mounting              | EBX31154MB34LHYR   | 4057                | 4213       | 4975       | 5179       | 10098      | 12636       | 15785       |
| 4 Pole C/O in Polycarbonate Enclosure | EBX31154B31LBGYR   | 4801                | 4988       | 5785       | 5990       | *          | *           | *           |
| 4 Pole C/O in SS Enclosure            | EBX31154SB31XLLHYR | *                   | *          | *          | *          | 13405      | 15925       | 19093       |

## Rating Selection Table



SB31 Enclosure

| Ampere<br>(A) | Code<br>(□) |
|---------------|-------------|
| 25            | E           |
| 32            | F           |
| 40            | G           |
| 63            | I           |

**Note :** SB 31 Enclosure for 25A to 63A ratings.

B21 Mounting model is similar to B13 model with links provided on the common side.

\*\*\* - Please contact nearest E&A branch office.

# Load Break Switches [8536]

## AC ON LOAD ISOLATORS

- › AC 23 Utilization category
  - › Range from 16-125 Amps upto 8 pole
  - › Multiple mounting options, ABS / Aluminium sheet steel enclosures / IP65 / NEMA Rated
  - › Add on pole Power / Neutral & Auxiliary pole
  - › Changerover switches from 25-125 Amps upto 4 poles
- Confirms to IEC 60947-1 & 3, EN 60947-3, UL60947-4-1



## LB 3 Pole ON - OFF Switches

| Description                                                   | Cat. No.          | Can also be given on request | M.R.P. (₹) Per Unit |         |         |         |         |         |         |          |          |
|---------------------------------------------------------------|-------------------|------------------------------|---------------------|---------|---------|---------|---------|---------|---------|----------|----------|
|                                                               |                   |                              | 16A (C)             | 20A (D) | 25A (E) | 32A (F) | 40A (G) | 63A (I) | 80A (J) | 100A (K) | 125A (L) |
| Single Hole MTG Switch with Flag Knob                         | LBX32300B19FPYR   |                              | 1065                | 1087    | *       | *       | *       | *       | *       | *        | *        |
| Front Plate MTG with Flag Knob                                | LBX32300B40FPYR   |                              | 1036                | 1065    | *       | *       | *       | *       | *       | *        | *        |
| Front Panel MTG with B03 (48x48) Plate                        | LBX32300B03FLYR   | 32309                        | 947                 | 970     | 1050    | 1087    | 1250    | 1340    | *       | *        | *        |
| Front Panel MTG with B13 (64x64) Plate with Flag Knob         | LBX32300B13FLYR   | 32306/32309                  | 947                 | 970     | 1050    | 1087    | 1250    | 1340    | 3388    | 4251     | 5339     |
| Front Panel MTG with B13 (64x64) Plate with BG Handle         | LBX32300B13BGYR   | 32309                        | *                   | *       | 1156    | 1195    | 1352    | 1429    | *       | *        | *        |
| DIN Rail MTG Switch with Flag Knob                            | LBX32300B23FLGB   |                              | *                   | *       | 1050    | 1087    | 1250    | 1340    | *       | *        | *        |
| Rectangular Pad Lock Switch with TDYR                         | LBX32300B30TDYR   |                              | *                   | *       | 1272    | 1340    | 1470    | 1547    | *       | *        | *        |
| Round Pad Lock Switch with RDYR                               | LBX32309B33RDYR   |                              | 1036                | 1064    | 1156    | 1195    | 1352    | 1429    | 3674    | 4585     | 5730     |
| Switch with B63 Lock & Key Version                            | LBX32309B63TDYR   |                              | *                   | *       | 1757    | 1837    | 1990    | 2043    | *       | *        | *        |
| Base MTG Switch with DIL and Pad Lock                         | LBX32309MB34RDYR  |                              | 1655                | 1706    | 1837    | 1938    | 2018    | 2172    | 4894    | 6111     | 7639     |
| Base MTG Switch with BG Handle                                | LBX32309MB42BGYR  |                              | 1655                | 1706    | 1837    | 1938    | 2018    | 2172    | 4894    | 6111     | 7639     |
| Switch in Polycarbonate Enclosure - in B31SM                  | LBX32300B31SMRDYR |                              | 2099                | 2162    | 2336    | 2396    | *       | *       | *       | *        | *        |
| Switch in Polycarbonate Enclosure - in B31M                   | LBX32309B31MRDYR  |                              | *                   | *       | *       | *       | 2620    | 2686    | *       | *        | *        |
| Switch in Polycarbonate Enclosure - in B31L with Leech Handle | LBX32309B31LLHYR  |                              | *                   | *       | *       | *       | *       | *       | 6894    | 8124     | 9641     |
| Switch in SS Enclosure - in SB31L with Leech Handle           | LBX32309SB31LLHYR |                              | *                   | *       | *       | *       | *       | *       | 6894    | 8124     | 9641     |

**Note :** To make the complete cat number, replace "X" in the above cat.no with the appropriate current rating code.(Example: For LBX32300B19FPYR with a 16A rating ( 16A code = C), the complete code becomes LBC32300B19FPYR.)




## LB 4 Pole ON - OFF Switches

| Description                                                   | Cat. No.          | Can also be given on request | M.R.P. (₹) Per Unit |         |         |         |         |         |         |          |          |
|---------------------------------------------------------------|-------------------|------------------------------|---------------------|---------|---------|---------|---------|---------|---------|----------|----------|
|                                                               |                   |                              | 16A (C)             | 20A (D) | 25A (E) | 32A (F) | 40A (G) | 63A (I) | 80A (J) | 100A (K) | 125A (L) |
| Single Hole MTG Switch with Flag Knob                         | LBX32400B19FPYR   |                              | 1324                | 1352    | *       | *       | *       | *       | *       | *        | *        |
| Front Plate MTG with Flag Knob                                | LBX32400B40FPYR   |                              | 1301                | 1324    | *       | *       | *       | *       | *       | *        | *        |
| Front Panel MTG with B03 (48x48) Plate                        | LBX32400B03FLYR   | 32409                        | 1208                | 1234    | 1341    | 1379    | 1613    | 1706    | *       | *        | *        |
| Front Panel MTG with B13 (64x64) Plate with Flag Knob         | LBX32400B13FLYR   | 32406/32409                  | 1208                | 1234    | 1341    | 1379    | 1613    | 1706    | 4160    | 5219     | 6540     |
| Front Panel MTG with B13 (64x64) Plate with BG Handle         | LBX32400B13BGYR   | 32409                        | 1445                | 1483    | 1719    | 1798    | *       | *       | *       | *        | *        |
| DIN Rail MTG Switch with Flag Knob                            | LBX32400B23FLGB   |                              | *                   | *       | 1341    | 1379    | 1613    | 1706    | *       | *        | *        |
| Rectangular Pad Lock Switch with TDYR                         | LBX32400B30TDYR   |                              | *                   | *       | 1559    | 1625    | 1833    | 1914    | *       | *        | *        |
| Round Pad Lock Switch with RDYR                               | LBX32409B33RDYR   |                              | 1301                | 1324    | 1445    | 1483    | 1719    | 1798    | 4251    | 5308     | 6636     |
| Switch with B63 Lock & Key Version                            | LBX32409B63TDYR   |                              | *                   | *       | 2043    | 2124    | 2354    | 2410    | *       | *        | *        |
| Base MTG Switch with DIL and Pad Lock                         | LBX32409MB34RDYR  |                              | 1914                | 1966    | 2124    | 2224    | 2387    | 2542    | 5668    | 7076     | 8843     |
| Base MTG Switch with BG Handle                                | LBX32409MB42BGYR  |                              | 1914                | 1966    | 2124    | 2224    | 2387    | 2542    | 5668    | 7076     | 8843     |
| Switch in Polycarbonate Enclosure - in B31SM                  | LBX32400B31SMRDYR |                              | 2354                | 2425    | 2620    | 2684    | *       | *       | *       | *        | *        |
| Switch in Polycarbonate Enclosure - in B31M                   | LBX32409B31MRDYR  |                              | *                   | *       | *       | *       | 2984    | 3051    | *       | *        | *        |
| Switch in Polycarbonate Enclosure - in B31L with Leech Handle | LBX32409B31LLHYR  |                              | *                   | *       | *       | *       | *       | *       | 7669    | 9090     | 10847    |
| Switch in SS Enclosure - in SB31L with Leech Handle           | LBX32409SB31LLHYR |                              | *                   | *       | *       | *       | *       | *       | 7669    | 9090     | 10847    |
| Auxiliary Contact                                             | FM / RM           |                              | 266                 | 266     | 329     | 329     | 329     | 329     | 970     | 970      | 970      |
| Add-on Contact Additional Pole                                | FM / RM           |                              | 275                 | 285     | 307     | 344     | 400     | 432     | 1133    | 1399     | 1556     |

**Note :** Standard packing upto 63A switches is 5 Nos.

**Note :** To make the complete cat number, replace "X" in the above cat.no with the appropriate current rating code.(Example: For LBX32300B19FPYR with a 16A rating ( 16A code = C), the complete code becomes LBC32300B19FPYR.)

# All Switches are Engineered with Nylon material Housing

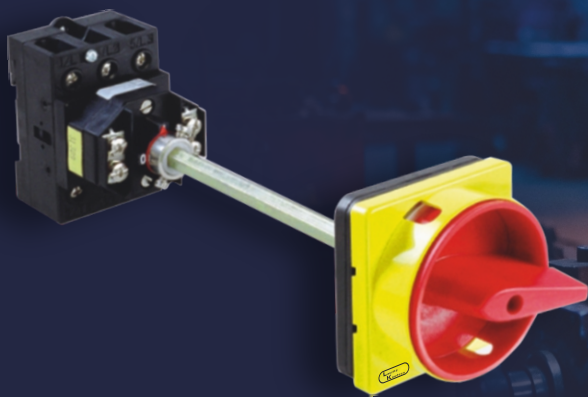

## Ordering Code for Load Break and Changeover Switches

|                                           |                                   |                                        |                                          |                                   |                          |
|-------------------------------------------|-----------------------------------|----------------------------------------|------------------------------------------|-----------------------------------|--------------------------|
| <b>LB</b><br>└<br>Load<br>Break<br>Switch | <b>□</b><br>└<br>Switch<br>Rating | <b>XXXXX</b><br>└<br>Programme<br>Code | <b>XXXXX</b><br>└<br>Mounting<br>Options | <b>XX</b><br>└<br>Knob<br>Options | <b>XX</b><br>└<br>Colour |
|-------------------------------------------|-----------------------------------|----------------------------------------|------------------------------------------|-----------------------------------|--------------------------|

### Example

LB Switches, 63A, 3P, 9 O'clock, 4  
hole front mounting, with metal shaft,  
yellow front plate, red round knob

LB I 32309 MB34 RD YR

| LB | I | 32309 | MB34 | RD | YR | Description                                                  |
|----|---|-------|------|----|----|--------------------------------------------------------------|
|    |   |       |      |    |    | Yellow Front Plate/<br>Red Knob                              |
|    |   |       |      |    |    | 64 x 64 Front Plate<br>Round Knob with<br>Padlock (R)        |
|    |   |       |      |    |    | Metal Shaft with<br>Round Knob with<br>Padlock and Interlock |
|    |   |       |      |    |    | 3Pole 9 O' Clock "OFF"                                       |
|    |   |       |      |    |    | 63A                                                          |
|    |   |       |      |    |    | Load Break Switch                                            |

### Accessories

|                                      |                                                      |                                                                              |                                                                                                                   |
|--------------------------------------|------------------------------------------------------|------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|
| <b>LB X</b><br>└<br>Switch<br>Rating | <b>X</b><br>└<br>F-Front Mounting<br>R-Rear Mounting | <b>XX</b><br>└<br>MC-Main Module<br>NC-Neutral Module<br>AC-Auxiliary Module | <b>XXX</b><br>└<br>20 - 16A to 20A<br>32 - 25A to 32A<br>63 - 40A to 63A<br>80 - 80A<br>125 - 100A,<br>125A & 80A |
|--------------------------------------|------------------------------------------------------|------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|

| LB | I | R | NC | 32 | Description       |
|----|---|---|----|----|-------------------|
|    |   |   |    |    | 32A               |
|    |   |   |    |    | Neutral Module    |
|    |   |   |    |    | Rear Mounting     |
|    |   |   |    |    | 63 A              |
|    |   |   |    |    | Load Break Switch |

### Rating Selection Table


| Ampere<br>(A) | Code<br>(□) |
|---------------|-------------|
| 16            | C           |
| 20            | D           |
| 25            | E           |
| 32            | F           |
| 40            | G           |
| 63            | I           |
| 80            | J           |
| 100           | K           |
| 125           | L           |

\*\*\* **Note** : Please contact nearest E&A branch office.

# Cable Ducts [8538]



## PVC Cable Ducts

› All ducts are ROHS compliant and FRLS › Also available in Zero Halogen

| Type A                                                                                                                                                                                                                                                                                                                                                                     | Description | 1 meter                      |                     |           |               | 2 meter                      |                     |           |               |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|------------------------------|---------------------|-----------|---------------|------------------------------|---------------------|-----------|---------------|
|                                                                                                                                                                                                                                                                                                                                                                            | H x W       | Cat. No.(Standard slot Grey) | M.R.P. (₹) Per Unit | Std. Pkg. | Min Order Qty | Cat. No.(Standard slot Grey) | M.R.P. (₹) Per Unit | Std. Pkg. | Min Order Qty |
|   <p>Specially designed profiles of duct and cover for fast and efficient locking.</p> <p><b>A Type</b></p> <ul style="list-style-type: none"> <li>• Snap fit cover</li> <li>• Easy to remove</li> </ul> | A 15 x 15   | WWA1515SG                    | 78                  | 100       | 100           | WWA1515SG2                   | 156                 | 64        | 64            |
|                                                                                                                                                                                                                                                                                                                                                                            | A 15 x 25   | WWA1525SG                    | 107                 | 100       | 100           | WWA1525SG2                   | 214                 | 64        | 64            |
|                                                                                                                                                                                                                                                                                                                                                                            | A 25 x 25   | WWA2525SG                    | 128                 | 70        | 70            | WWA2525SG2                   | 256                 | 48        | 48            |
|                                                                                                                                                                                                                                                                                                                                                                            | A 30 x 25   | WWA3025SG                    | 142                 | 70        | 70            | WWA3025SG2                   | 284                 | 48        | 48            |
|                                                                                                                                                                                                                                                                                                                                                                            | A 40 x 30   | WWA4030SG                    | 176                 | 75        | 75            | WWA4030SG2                   | 352                 | 32        | 32            |
|                                                                                                                                                                                                                                                                                                                                                                            | A 45 x 25   | WWA4525SG                    | 181                 | 75        | 75            | WWA4525SG2                   | 362                 | 40        | 40            |
|                                                                                                                                                                                                                                                                                                                                                                            | A 45 x 30   | WWA4530SG                    | 182                 | 50        | 50            | WWA4530SG2                   | 364                 | 32        | 32            |
|                                                                                                                                                                                                                                                                                                                                                                            | A 45 x 45   | WWA4545SG                    | 230                 | 50        | 50            | WWA4545SG2                   | 460                 | 18        | 18            |
|                                                                                                                                                                                                                                                                                                                                                                            | A 45 x 60   | WWA4560SG                    | 277                 | 50        | 50            | WWA4560SG2                   | 554                 | 12        | 12            |
|                                                                                                                                                                                                                                                                                                                                                                            | A 60 x 25   | WWA6025SG                    | 230                 | 50        | 50            | WWA6025SG2                   | 460                 | 18        | 18            |
|                                                                                                                                                                                                                                                                                                                                                                            | A 60 x 45   | WWA6045SG                    | 270                 | 50        | 50            | WWA6045SG2                   | 540                 | 18        | 18            |
|                                                                                                                                                                                                                                                                                                                                                                            | A 60 x 60   | WWA6060SG                    | 320                 | 32        | 32            | WWA6060SG2                   | 640                 | 12        | 12            |
|                                                                                                                                                                                                                                                                                                                                                                            | A 60 x 120  | WWA60120SG                   | 1088                | 18        | 90            | WWA60120SG2                  | 2176                | 8         | 80            |
|                                                                                                                                                                                                                                                                                                                                                                            | A 75 x 45   | WWA7545SG                    | 335                 | 40        | 40            | WWA7545SG2                   | 670                 | 12        | 12            |
|                                                                                                                                                                                                                                                                                                                                                                            | A 75 x 75   | WWA7575SG                    | 473                 | 32        | 32            | WWA7575SG2                   | 946                 | 12        | 12            |
|                                                                                                                                                                                                                                                                                                                                                                            | A 80 x 80   | WWA8080SG                    | 528                 | 25        | 25            | WWA8080SG2                   | 1056                | 12        | 12            |
|                                                                                                                                                                                                                                                                                                                                                                            | A 100 x 100 | WWA100100SG                  | 854                 | 18        | 18            | WWA100100SG2                 | 1708                | 8         | 40            |





| Type B                                                                                                                                                                                                                                                                                                          | Description | 1 meter                     |                        |              |                  | 2 meter                     |                        |              |                  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-----------------------------|------------------------|--------------|------------------|-----------------------------|------------------------|--------------|------------------|
|                                                                                                                                                                                                                                                                                                                 | W x H       | Cat. No.<br>(Standard slot) | M.R.P. (₹)<br>Per Unit | Std.<br>Pkg. | Min Order<br>Qty | Cat. No.<br>(Standard slot) | M.R.P. (₹)<br>Per Unit | Std.<br>Pkg. | Min Order<br>Qty |
|  <p>Non slip cover design of minimum encumbrance and maximum grip</p>  <p><b>B Type</b></p> <p>* Non - slip cover<br/>* Positive locking</p> | B 25 x 25   | WWB2525SG                   | 138                    | 70           | 70               | WWB2525SG2                  | 276                    | 36           | 36               |
|                                                                                                                                                                                                                                                                                                                 | B 25 x 30   | WWB2530SG                   | 148                    | 100          | 100              | WWB2530SG2                  | 296                    | 36           | 36               |
|                                                                                                                                                                                                                                                                                                                 | B 25 x 40   | WWB2540SG                   | 181                    | 75           | 75               | WWB2540SG2                  | 362                    | 36           | 36               |
|                                                                                                                                                                                                                                                                                                                 | B 25 x 45   | WWB2545SG                   | 187                    | 75           | 225              | WWB2545SG2                  | 374                    | 36           | 108              |
|                                                                                                                                                                                                                                                                                                                 | B 25 x 60   | WWB2560SG                   | 237                    | 50           | 50               | WWB2560SG2                  | 474                    | 18           | 18               |
|                                                                                                                                                                                                                                                                                                                 | B 25 x 80   | WWB2580SG                   | 321                    | 50           | 50               | WWB2580SG2                  | 642                    | 18           | 18               |
|                                                                                                                                                                                                                                                                                                                 | B 25 x 100  | WWB25100SG                  | 407                    | 25           | 25               | WWB25100SG2                 | 814                    | 18           | 18               |
|                                                                                                                                                                                                                                                                                                                 | B 30 x 20   | WWB3020UG                   | 181                    | 100          | 200              | WWB3020UG2                  | 362                    | 36           | 180              |
|                                                                                                                                                                                                                                                                                                                 | B 30 x 80   | WWB3080SG                   | 445                    | 50           | 200              | WWB3080SG2                  | 890                    | 18           | 90               |
|                                                                                                                                                                                                                                                                                                                 | B 40 x 40   | WWB4040SG                   | 237                    | 50           | 50               | WWB4040SG2                  | 474                    | 18           | 18               |
|                                                                                                                                                                                                                                                                                                                 | B 45 x 45   | WWB4545SG                   | 245                    | 50           | 50               | WWB4545SG2                  | 490                    | 18           | 18               |
|                                                                                                                                                                                                                                                                                                                 | B 40 x 60   | WWB4060SG                   | 287                    | 50           | 50               | WWB4060SG2                  | 574                    | 18           | 18               |
|                                                                                                                                                                                                                                                                                                                 | B 40 x 80   | WWB4080SG                   | 339                    | 50           | 50               | WWB4080SG2                  | 678                    | 18           | 18               |
|                                                                                                                                                                                                                                                                                                                 | B 40 x 100  | WWB40100SG                  | 426                    | 25           | 25               | WWB40100SG2                 | 852                    | 12           | 12               |
|                                                                                                                                                                                                                                                                                                                 | B 45 x 20   | WWB4520UG                   | 188                    | 75           | 225              | WWB4520UG2                  | 376                    | 36           | 180              |
|                                                                                                                                                                                                                                                                                                                 | B 50 x 100  | WWB50100SG                  | 489                    | 30           | 90               | WWB50100SG2                 | 978                    | 12           | 60               |
|                                                                                                                                                                                                                                                                                                                 | B 60 x 20   | WWB6020UG                   | 256                    | 50           | 200              | WWB6020UG2                  | 512                    | 18           | 90               |
|                                                                                                                                                                                                                                                                                                                 | B 60 x 40   | WWB6040SG                   | 287                    | 50           | 50               | WWB6040SG2                  | 574                    | 18           | 90               |
|                                                                                                                                                                                                                                                                                                                 | B 60 x 60   | WWB6060SG                   | 339                    | 50           | 50               | WWB6060SG2                  | 678                    | 12           | 12               |
|                                                                                                                                                                                                                                                                                                                 | B 60 x 80   | WWB6080SG                   | 441                    | 40           | 40               | WWB6080SG2                  | 882                    | 12           | 12               |
|                                                                                                                                                                                                                                                                                                                 | B 60 x 100  | WWB60100SG                  | 581                    | 30           | 30               | WWB60100SG2                 | 1162                   | 8            | 8                |
|                                                                                                                                                                                                                                                                                                                 | B 72 x 64   | WWB7264SG                   | 407                    | 32           | 96               | WWB7264SG2                  | 814                    | 18           | 90               |
|                                                                                                                                                                                                                                                                                                                 | B 75 x 75   | WWB7575SG                   | 573                    | 32           | 96               | WWB7575SG2                  | 1146                   | 8            | 40               |
|                                                                                                                                                                                                                                                                                                                 | B 75 x 100  | WWB75100SG                  | 600                    | 25           | 75               | WWB75100SG2                 | 1200                   | 8            | 40               |
|                                                                                                                                                                                                                                                                                                                 | B 80 x 40   | WWB8040SG                   | 347                    | 50           | 100              | WWB8040SG2                  | 694                    | 12           | 60               |
|                                                                                                                                                                                                                                                                                                                 | B 80 x 60   | WWB8060SG                   | 459                    | 40           | 80               | WWB8060SG2                  | 918                    | 12           | 60               |
|                                                                                                                                                                                                                                                                                                                 | B 80 x 80   | WWB8080SG                   | 570                    | 32           | 32               | WWB8080SG2                  | 1140                   | 12           | 12               |
|                                                                                                                                                                                                                                                                                                                 | B 80 x 100  | WWB80100SG                  | 642                    | 24           | 24               | WWB80100SG2                 | 1284                   | 8            | 8                |
|                                                                                                                                                                                                                                                                                                                 | B 100 x 60  | WWB10060SG                  | 546                    | 30           | 30               | WWB10060SG2                 | 1092                   | 8            | 8                |
|                                                                                                                                                                                                                                                                                                                 | B 100 x 80  | WWB10080SG                  | 642                    | 25           | 25               | WWB10080SG2                 | 1284                   | 8            | 8                |
|                                                                                                                                                                                                                                                                                                                 | B 100 x 100 | WWB100100SG                 | 935                    | 18           | 18               | WWB100100SG2                | 1870                   | 8            | 8                |
|                                                                                                                                                                                                                                                                                                                 | B 120 x 80  | WWB12080SG                  | 908                    | 18           | 90               | WWB12080SG2                 | 1816                   | 8            | 40               |
|                                                                                                                                                                                                                                                                                                                 | B 150 x 100 | WWB150100SG                 | 1167                   | 12           | 48               | WWB150100SG2                | 2334                   | 4            | 40               |
|                                                                                                                                                                                                                                                                                                                 | B 150 x 150 | WWB150150SG                 | 2536                   | 8            | 80               | WWB150150SG2                | 5072                   | 2            | 40               |


**Note :** 1) For any special colour request additional 10% will be charged on price. For cut length additional 10% will be charged.  
2) Thin / Unslot will be supplied on request. For thin slot replace the cat. number ending with SG by TG,  
For un slotted channel replace the cat. number ending with SG by UG. MRP will be same as standard slot.



## Covers for FRLS Cable Duct (Cable duct comes with default covers, following are spare offerings)

|  | Description             | Cat. No. | M.R.P. (₹)<br>Per Unit |
|-----------------------------------------------------------------------------------|-------------------------|----------|------------------------|
|                                                                                   | Cover for 15 mm A type  | CCA15SG  | 36                     |
|                                                                                   | Cover for 25 mm A type  | CCA25SG  | 56                     |
|                                                                                   | Cover for 30 mm A type  | CCA30SG  | 68                     |
|                                                                                   | Cover for 45 mm A type  | CCA45SG  | 106                    |
|                                                                                   | Cover for 60 mm A type  | CCA60SG  | 127                    |
|                                                                                   | Cover for 75 mm A type  | CCA75SG  | 161                    |
|                                                                                   | Cover for 80 mm A type  | CCA80SG  | 191                    |
|                                                                                   | Cover for 100 mm A type | CCA100SG | 233                    |
|                                                                                   | Cover for 25 mm B type  | CCB25SG  | 58                     |
|                                                                                   | Cover for 30 mm B type  | CCB30SG  | 70                     |
|                                                                                   | Cover for 40 mm B type  | CCB40SG  | 88                     |
|                                                                                   | Cover for 45 mm B type  | CCB45SG  | 108                    |
|                                                                                   | Cover for 50 mm B type  | CCB50SG  | 130                    |
|                                                                                   | Cover for 60 mm B type  | CCB60SG  | 130                    |
|                                                                                   | Cover for 72 mm B type  | CCB72SG  | 165                    |
|                                                                                   | Cover for 75 mm B type  | CCB75SG  | 165                    |
|                                                                                   | Cover for 80 mm B type  | CCB80SG  | 197                    |
|                                                                                   | Cover for 100 mm B type | CCB100SG | 240                    |
|                                                                                   | Cover for 120 mm B type | CCB120SG | 256                    |
|                                                                                   | Cover for 150 mm B type | CCB150SG | 300                    |

### Slotting Styles (A & B Types)

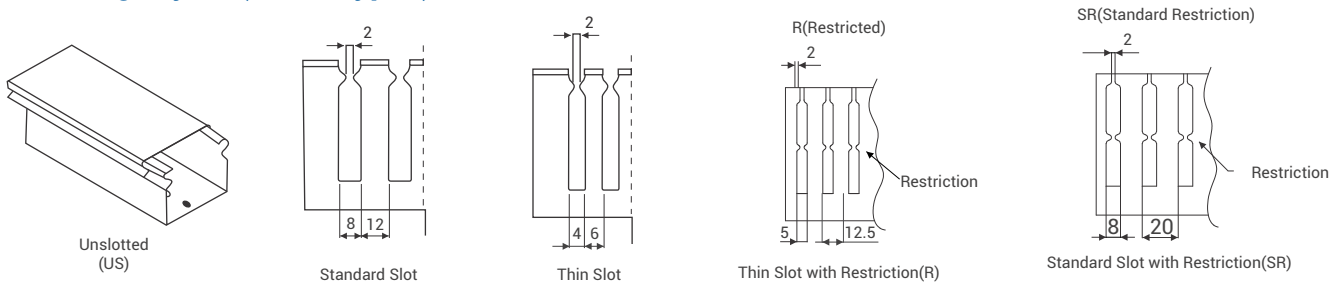

These products are manufactured by

**salzer**

#### Disclaimer

Every effort as to the correctness or sufficiency of the information and data contained in the catalogue is made. We however cannot accept any liability for the accuracy or completeness of the information and data provided. No claims in this regard shall consequently be accepted.

We reserve the right to make changes, without prior notice, in the catalogue.

Products with CAT no. having, with or without, dot as suffix are same.

# Control & Protect Your Panels with **Precision & Reliability**



## Earth Leakage Relay

***Built on Trust.*** Designed for high performance.

LED Indications for power on, alarm and trip for easy identification

---

Ease of programming using dial and dip switches

---

MODBUS RS485 communication port available

---

Wide trip time setting from 0-10 sec



# ULTIMATE DIGITAL VOLTAGE MONITORING RELAY

WITH ADVANCED NEUTRAL LOSS FEATURE



Phase  
Loss



Phase  
Asymmetry



Phase  
Reverse



Neutral  
Loss



Over  
Voltage



Under  
Voltage

**SWITCH TO DIGITAL VOLTAGE MONITORING RELAY-SM800**



# Timing Devices, Supply Monitors & ELR

## Timers [9107]

|  <b>Micon 175</b> | Type                         | Time                                                    | Voltage           | Contact Arrangement        | Cat. No. | M.R.P. (₹) Per Unit |
|-----------------------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------|-------------------|----------------------------|----------|---------------------|
|                                                                                                     | ON Delay                     | 0.3 sec - 30 hrs                                        | 240 VAC/24 VAC/DC | 1 C/O                      | 12ODT4   | 845                 |
|                                                                                                     |                              |                                                         | 110 VAC/24 VAC/DC |                            | 110DT4   | 1490                |
|                                                                                                     |                              |                                                         | 12 VDC            |                            | 150DT4   | 1220                |
|                                                                                                     | ON Delay & Interval          | 0.1 sec - 100 hrs                                       | 240 VAC/24 VAC/DC | 1 C/O                      | 12WDT4   | 1225                |
|                                                                                                     | Star Delta Timer             | 3 sec - 120 sec                                         | 240 VAC           | 1 NO (Star)+1 NO (Delta)   | 12SDT0   | 950                 |
|                                                                                                     |                              | 3 sec - 30 sec                                          | 240 - 415 VAC     | 1 C/O (Star)+1 C/O (Delta) | 14SDT1S  | 1570                |
|                                                                                                     | Signal OFF Delay             | 0.3 sec - 30 hrs                                        | 240 VAC/24 VAC/DC | 1 C/O                      | 12RDT4   | 1155                |
|                                                                                                     |                              | 0.3 sec - 30 hrs                                        | 12 VDC            |                            | 15DDT4   | 1255                |
|                                                                                                     | Multifunction Timer          | 0.1 sec - 100 hrs                                       | 12 - 240 VAC/DC   | 1 C/O                      | 1CMDT0   | 1965                |
|                                                                                                     |                              |                                                         |                   | 2 C/O                      | 1CMDTF   | 2095                |
|                                                                                                     | Asymmetrical ON/OFF & OFF/ON | 0.1 sec - 100 hrs                                       | 12 - 240 VAC/DC   | 1 C/O                      | 1CJDT0   | 1965                |
|                                                                                                     | One Shot                     | 0.3 sec - 30 hrs                                        | 110 VAC/24 VAC/DC | 1 C/O                      | 11BDT4   | 1465                |
|                                                                                                     |                              |                                                         | 240 VAC/24 VAC/DC |                            | 12BDT4   | 1465                |
|                                                                                                     |                              |                                                         | 12 VDC            |                            | 15BDT4   | 1535                |
|                                                                                                     | Forward Pause Reverse Timer  | ON time : 6 sec -60 min<br>Pause time : 0.1 sec-200 sec | 12 - 240 VAC / DC | 2 C/O                      | 1CZDTF   | 2095                |

Pause time for Micon 175 star delta timer is 60 msec

1CMDT0 contains ON Delay, Impulse, Signal ON delay, Cyclic ON/OFF, Cyclic OFF/ON, Signal OFF Delay, Signal OFF/ON, Accumulative Delay ON signal, Impulse ON/OFF, Leading edge impulse, Trailing edge impulse, Leading edge Bistable

## On Delay and Star Delta Timer

### Precision in Every pulse. Reliability in Every Start





| <b>Micon 225</b><br> | Type                                    | Timing Range      | Voltage         | Contact Arrangement                   | Cat. No. | M.R.P. (₹) Per Unit |
|-------------------------------------------------------------------------------------------------------|-----------------------------------------|-------------------|-----------------|---------------------------------------|----------|---------------------|
|                                                                                                       | ON Delay                                | 0.1 sec - 10 hrs  | 24 - 240 VAC/DC | 2 C/O                                 | 2AODT5   | 1840                |
|                                                                                                       | Star Delta Timer                        | 3 sec - 120 sec   | 24 - 240 VAC/DC | 1 NO (Star)+1 NO (Delta)              | 2ASDT0   | 1925                |
|                                                                                                       |                                         |                   | 240 - 415 VAC   |                                       | 2BSDT0   | 2275                |
|                                                                                                       | Multifunction Timer                     | 0.1s to 120 days  | 24 - 240 VAC/DC | 2 C/O (1 Inst+1 Delayed)              | 2A8DT6   | 2065                |
|                                                                                                       | Multifunction Multirange                | 0.1 sec - 10 hrs  | 24 - 240 VAC/DC | 2 C/O                                 | 2A5DT5   | 2040                |
|                                                                                                       |                                         |                   | 240 - 415 VAC   |                                       | 2B5DT5   | 2455                |
|                                                                                                       | Signal Base Multi function - Multirange | 0.1 sec - 10 hrs  | 24 - 240 VAC/DC | 1 C/O                                 | 2ANDT0   | 2170                |
|                                                                                                       | Multifunction Timer 6 Functions         | 0.1 sec - 10 hrs  | 24 - 240 VAC/DC | 2 C/O (1 Inst+1 Delayed for 6th Mode) | 2A6DT6   | 2185                |
|                                                                                                       |                                         |                   | 240 - 415 VAC   |                                       | 2B6DT6   | 2225                |
|                                                                                                       | True OFF Delay                          | 0.6 sec - 600 sec | 24 - 240 VAC/DC | 2 C/O                                 | 23GDT0   | 3000                |
|                                                                                                       | Asymmetrical ON/OFF                     | 0.1 sec - 10 hrs  | 24 - 240 VAC/DC | 2 C/O                                 | 2AADT5   | 2310                |

Pause time for Micon 225 star delta timer is 60 msec, 90 msec, 120 msec, 150 msec

Major timing functions

2A5DT5, 2B5DT5, 2A6DT6\* and 2B6DT6\* contains ON Delay, Interval, Cyclic ON/OFF, Cyclic OFF/ON, One Shot, ON Delay, On Delay (1 Inst + 1 Delayed)\*

2ANDT0 contains ON Delay, Interval, Signal ON Delay, Accumulative ON Delay, Signal OFF Delay, Signal OFF/ON Delay, Leading edge impulse

2A8DT6 contains ON Delay, Impulse, Signal ON delay, Signal OFF delay, Step mode, One shot, Interval, Cyclic ON/OFF, Cyclic OFF/ON, Signal OFF Delay, Accumulative Delay ON signal, Impulse ON/OFF.

| <b>Digital Timer DIGICON</b><br> | Functions    | Timer             | Voltage         | Contact Arrangement | Cat. No. | M.R.P. (₹) Per Unit |
|---------------------------------------------------------------------------------------------------------------------|--------------|-------------------|-----------------|---------------------|----------|---------------------|
|                                                                                                                     | 8 Functions  | 0.1 sec - 999 hrs | 24 - 240 VAC/DC | 1 C/O               | V0DDTS   | 2285                |
|                                                                                                                     |              |                   | 24 - 240 VAC/DC | 2 NO                | V0DDTD   | 2285                |
|                                                                                                                     | 18 Functions | 0.1 sec - 999 hrs | 24 - 240 VAC/DC | 1 C/O               | V0DDTS1  | 2585                |
|                                                                                                                     |              |                   | 24 - 240 VAC/DC | 2 NO                | V0DDTD1  | 2585                |

V0DDTS and V0DDTD contains On Delay, Signal OFF Delay, Cyclic ON/OFF, Signal OFF/ON, Cyclic OFF/ON, Interval, Signal ON/OFF, One Shot output  
V0DDTS1 and V0DDTD1 contains ON Delay, Cyclic OFF/ON, Cyclic ON/OFF, Impulse on energizing, Accumulative Delay ON Signal, Accumulative Delay on Inverted signal, Accumulative Impulse ON signal, Signal ON Delay, Inverted Signal On delay, Signal OFF Delay, Impulse ON/OFF, Signal OFF/ON, Leading edge impulse, Trailing edge impulse, Delayed impulse, Negative edge impulse.

| <b>Motor Restart Timer</b><br> | Functions           | Timer                        | Voltage | Contact Arrangement | Cat. No. | M.R.P. (₹) Per Unit |
|-------------------------------------------------------------------------------------------------------------------|---------------------|------------------------------|---------|---------------------|----------|---------------------|
|                                                                                                                   | Motor Restart Timer | Memory time Tm: 0.2 to 6 sec | 110 VAC | 1 C/O               | 23LDT0   | 2415                |
|                                                                                                                   |                     | Delay time Td: 0.2 to 60 sec | 240 VAC |                     | 22LDT0   | 2415                |

## Time Switches [9107]

|  <b>FM1 / Quartz</b><br>150 Hrs Battery Backup | Product Description |                                     | Cat. No. | M.R.P. (₹) Per Unit |
|---------------------------------------------------------------------------------------------------------------------------------|---------------------|-------------------------------------|----------|---------------------|
|                                                                                                                                 | FM1 / Quartz Daily  | 110 VAC - 240 VAC Base/DIN Mounting | J648B1   | 3140                |

|  <b>Digital Time Switch</b><br>Crono Pro Crono / Pulse | Product Description     |                                             | Cat. No. | M.R.P. (₹) Per Unit |
|-----------------------------------------------------------------------------------------------------------------------------------------|-------------------------|---------------------------------------------|----------|---------------------|
|                                                                                                                                         | Time Switch (Crono)     | 110 - 240 VAC 1 C/O Base/DIN 25 ON/OFF Each | 67DDT0   | 3060                |
|                                                                                                                                         |                         | 24 VDC 1 C/O Base/DIN 25 ON/OFF Each        | 6GHDT0   | 3615                |
|                                                                                                                                         |                         | 12 VDC 1 C/O Base/DIN 25 ON/OFF Each        | 69HDT0   | 3805                |
|                                                                                                                                         | Time Switch (Crono Pro) | 110 - 240 VAC 2 C/O Base/DIN 50 ON/OFF Each | WT2DCDS  | 4335                |
|                                                                                                                                         | Time Switch (Pulse) *   | 110 - 240 VAC 1 C/O Base/DIN 16 Pulse       | 67DDT9   | 3555                |
|                                                                                                                                         |                         | 24V DC 1 C/O Base /Din 16 Pulse             | 6GHDT9   | 4010                |
|                                                                                                                                         |                         | 12V DC 1 C/O Base /Din 16 Pulse             | 69HDT9   | 4215                |

\* For bell and siren application

|  <b>Astro</b><br>Astro Pro Astro Mini | Product Description |                                                            | Cat. No. | M.R.P. (₹) Per Unit |
|--------------------------------------------------------------------------------------------------------------------------|---------------------|------------------------------------------------------------|----------|---------------------|
|                                                                                                                          | Astro Mini          | 110 - 240 VAC 1 Phase - 2W 1 C/O , Base/Din                | T2DDT7   | 5945                |
|                                                                                                                          | Astro Pro           | 110 - 240 VAC 1 Phase - 2W 2 C/O , Base/Din 50 ON/OFF Each | AS2DCDS  | 7275                |
|                                                                                                                          | Astro               | 110 - 240 VAC 3 Phase - 4W 3 Channel 3 N/O , Base/Din      | T3DDT0*  | 14990               |

\* Available till stock lasts.

**Note :** Astro Mini / Astro Pro is used for lighting control based on sunrise / sunset timings by latitude / longitude settings primarily used in streetlight application



## Supply Monitoring Devices [9032]

- › SPP includes single phasing, phase sequence and phase unbalance monitoring with auto reset

| Voltage Monitoring Relay Series                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Type                    | Supply Monitoring Type                                                                                              | Time delay                                                                                 | Asymmetry                                                                | Voltage & Contact Arrangement                 | Cat. No.    | M.R.P. (₹) Per Unit |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|---------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|-----------------------------------------------|-------------|---------------------|
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                         |                                                                                                                     |                                                                                            |                                                                          |                                               |             |                     |
|  <p><b>SM 301</b></p>  <p><b>SM 500</b></p>  <p><b>SM 500 with Neutral Loss Protection</b></p>  <p><b>SM 501</b></p> <p><b>Digital VMR Series</b></p>  <p><b>SM 800</b></p>  <p><b>SM 600 (MMR)</b></p> | SM301 (3Ph, 3W)         | Single Phasing Preventor (SPP*) Fail Safe                                                                           | ON Delay 2 sec and OFF Delay 7 sec                                                         | 65 VAC Asymmetry                                                         | 415 VAC, 1 C/O                                | MA51BC      | 1340                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                         |                                                                                                                     |                                                                                            | 40 VAC Asymmetry                                                         | 415 VAC, 2 C/O                                | MC21B5      | 1960                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                         |                                                                                                                     |                                                                                            |                                                                          | 415 VAC, 1 C/O                                | MA51BK      | 1340                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | SM301 (3Ph, 3W)         | Phase loss monitoring Non Fail Safe Type                                                                            | OFF Delay 500 msec and Recover Delay 2 Sec                                                 | 30% Fixed                                                                | 415 VAC, 1 C/O                                | MA59B5      | 1540                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | SM500 (3 Ph / 1 Ph, 4W) | Selectable Under Voltage + Selectable Over Voltage                                                                  | Selectable ON Delay (0 to 15 min)                                                          | -                                                                        | 240 VAC, 1 C/O                                | MD71B9      | 2080                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                         |                                                                                                                     | Selectable ON Delay (0 to 15 sec)                                                          | -                                                                        |                                               | MD71BH      | 2080                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                         |                                                                                                                     | Selectable OFF Delay (0 to 15 sec)                                                         | -                                                                        |                                               | MD71BF      | 2435                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                         | Single Phasing Preventor + Selectable Under Voltage + Selectable Over Voltage                                       | Selectable ON Delay (0 to 15 min) & OFF Delay 5 sec                                        | Phase Asymmetry 10% fixed                                                | 240 VAC, 2 C/O                                | MG73B9      | 2540                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                         |                                                                                                                     | Selectable ON Delay (0 to 15 sec) & OFF Delay 5 sec                                        | Phase Asymmetry 10% fixed                                                |                                               | MG73BH      | 2540                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                         |                                                                                                                     | Selectable OFF Delay (0 to 15 sec) & ON Delay 5 sec                                        | Phase Asymmetry 10% fixed                                                |                                               | MG73BF      | 2540                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                         | SPP + UV/OV, with fixed UV (173 V) & OV (288 V)                                                                     | Selectable ON (10 Sec) and OFF Delay (5 Sec)                                               | Phase Asymmetry 20% fixed                                                | 415 VAC, 3 Ph 4W, 2 C/O                       | MG73BR      | 2540                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                         | SPP + Selectable UV + Selectable OV with Neutral Loss Protection                                                    | ON Delay 5 sec and OFF Delay 5 sec, 500ms-1s for Neutral fail                              | 94 VAC Asymmetry                                                         |                                               | MAC04 D0100 | 2600                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | SM501 (3 Ph, 3W)        | SPP + Under Voltage (80% of 400V)                                                                                   | Selectable ON Delay and OFF Delay 15 sec                                                   | Selectable Asymmetry (5% to 17%)                                         | 415 VAC, 2 C/O                                | MB53BM      | 2585                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                         | Single Phasing Preventor + Selectable Under Voltage + Selectable Over Voltage                                       | Selectable ON Delay 15 sec & OFF Delay 5 sec                                               | Phase Asymmetry 10%                                                      |                                               | MG53BH      | 2585                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                         |                                                                                                                     | Selectable OFF Delay 15 sec & ON Delay 5 sec                                               | Phase Asymmetry 10%                                                      |                                               | MG53BF      | 2585                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                         |                                                                                                                     | ON Delay 5 sec and OFF Delay 5 sec                                                         | 65 VAC Asymmetry                                                         |                                               | MG53BI      | 2440                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                         |                                                                                                                     | ON Delay 3 min and OFF Delay 5 sec UV 85% of 400V OV 110% of 400V                          | Phase Asymmetry 10%                                                      |                                               | MG53BO      | 2440                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | SM 800 (3PH/ 3W, 4W)    | Single Phasing Preventor + Selectable Under Voltage + Selectable Over Voltage + Neutral Loss (Applicable for 3P4W). | Power ON Delay (0 to 999 sec) , OFF Delay (0.1 to 999 sec) & ON delay (0.5 to 999 sec)     | Voltage: 5 to 99 VAC (Default 60V) , Percentage : 2 to 50% (Default 10%) | 145-500 VAC (Line Voltage), 1C/O              | DMS110      | 2475                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                         |                                                                                                                     |                                                                                            |                                                                          | 145-500 VAC (Line Voltage), 2C/O              | DMS120      | 2680                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                         |                                                                                                                     |                                                                                            |                                                                          | 85-300 VAC/DC (Auxiliary Supply) (P-N), 2 C/O | DMA220      | 2890                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | SM 600 (3P, 3W)         | Phase loss + Phase Sequence + Phase Asymmetry + UV + OV + 3 phase interruption                                      | Power ON delay (5s Fixed), ON delay (1-30 sec or Fixed), OFF delay (0.1 - 30 sec or Fixed) | Voltage $\pm$ 1% of set value                                            | 500V -1000V AC 2 C/O                          | SMB110      | 11935               |

Note : 3 Ph 3W - 3 Phase 3 Wire system; 3 Ph 4W - 3 Phase 4 Wire system.



| <div><div>Voltage Monitoring Relay Series</div><div></div><div>SM175<br/>3 Ph, 3W</div></div> | Type                | Supply Monitoring Type                                                                                                                                       | Time delay                                                | Asymmetry                            | Voltage & Contact Arrangement                                                              | Cat. No. | M.R.P. (₹) Per Unit |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------|--------------------------------------|--------------------------------------------------------------------------------------------|----------|---------------------|
|                                                                                                                                                                                | SM175<br>(3 Ph, 3W) | Phase loss + Phase Sequence Monitoring                                                                                                                       | ON Delay 500 msec & OFF Delay 100 msec                    | —                                    | 208 - 480 VAC,<br>1 C/O (Steps of<br>208 - 220 -<br>380 - 400 -<br>415 - 440 -<br>480 VAC) | MK21D5   | 1600                |
|                                                                                                                                                                                |                     |                                                                                                                                                              | ON Delay 500 msec & OFF Delay 100 msec                    | Phase Asymmetry (30% fixed)          |                                                                                            | MC21D5   | 1600                |
|                                                                                                                                                                                |                     |                                                                                                                                                              | ON Delay 5 sec & OFF Delay 100 msec (0 to 15s Selectable) | Phase Asymmetry (5% to 15% variable) |                                                                                            | MA21DN   | 2090                |
|                                                                                                                                                                                |                     | Phase Loss + Phase Sequence + Under Voltage + Over Voltage monitoring (UV: -2% to -20% of $\frac{U_n}{\sqrt{3}}$ , OV: 2% to 20% of $\frac{U_n}{\sqrt{3}}$ ) | ON Delay 5 sec and Selectable OFF Delay (0 to 15 sec)     | —                                    |                                                                                            | MD21DF   | 2145                |
|                                                                                                                                                                                |                     | Phase Loss + Phase Sequence + Under Voltage + Over Voltage (UV: -5% to -25% of $\frac{U_n}{\sqrt{3}}$ , OV: 5% to 25% of $\frac{U_n}{\sqrt{3}}$ )            | Selectable ON Delay (0.5 to 15 sec) and OFF Delay 5 sec   | Phase Asymmetry (10% fixed)          |                                                                                            | MG21DH   | 2345                |
|                                                                                                                                                                                |                     |                                                                                                                                                              | ON Delay 5s and Selectable OFF                            |                                      |                                                                                            | MG21DF   | 2345                |

# Monitoring Voltage. Safe gaurding system.



## Current Monitoring relay (CMR)

- › Microprocessor based relay protects against Overload, Phase reverse, Phase loss, Phase unbalance faults
- › Auto/ Manual reset selection
- › Fail- safe protection with inbuilt CT upto 45A
- › Inverse time model with underload, locked rotor protection and selectable trip class (10A, 10, 20, 30)
- › Definite time model with underload and selectable start and trip time


| <b>Current Monitoring relay</b><br><br> | Phase   | Type                                   | Current & Contact Arrangement | Cat. No.  | M.R.P. (₹) Per Unit |
|---------------------------------------------------------------------------------------------------------------------------|---------|----------------------------------------|-------------------------------|-----------|---------------------|
|                                                                                                                           | 3 Phase | Inverse Time Current Monitoring Relay  | 2 - 5A 1 C/O                  | 17A422CB0 | 2880                |
|                                                                                                                           |         |                                        | 3 - 9A, 1 C/O                 | 17A122CB0 |                     |
|                                                                                                                           |         |                                        | 8 - 24A, 1 C/O                | 17A222CB0 |                     |
|                                                                                                                           |         |                                        | 15 - 45A, 1 C/O               | 17A322CB0 |                     |
|                                                                                                                           |         | Definite Time Current Monitoring Relay | 2 - 5A 1 C/O                  | 17B422AA0 |                     |
|                                                                                                                           |         |                                        | 3 - 9A, 1 C/O                 | 17B122AA0 |                     |
|                                                                                                                           |         |                                        | 8 - 24A, 1 C/O                | 17B222AA0 |                     |
|                                                                                                                           |         |                                        | 15 - 45A, 1 C/O               | 17B322AA0 |                     |
|                                                                                                                           | 1 Phase | Definite Type / Instant Trip           | 2 - 5A 1 C/O                  | 17B422PA0 | 2820                |
|                                                                                                                           |         | Inverse Time Current Monitoring Relay  | 2 - 5A 1 C/O                  | 17C412EB0 |                     |
|                                                                                                                           |         |                                        | 3 - 9A, 1 C/O                 | 17C112EB0 |                     |
|                                                                                                                           |         |                                        | 8 - 24A, 1 C/O                | 17C212EB0 |                     |
|                                                                                                                           |         |                                        | 15 - 45A, 1 C/O               | 17C312EB0 |                     |
|                                                                                                                           |         | Definite Time Current Monitoring Relay | 2 - 5A 1 C/O                  | 17D412DA0 |                     |
|                                                                                                                           |         |                                        | 3 - 9A, 1 C/O                 | 17D112DA0 |                     |
|                                                                                                                           |         |                                        | 8 - 24A, 1 C/O                | 17D212DA0 |                     |
|                                                                                                                           |         |                                        | 15 - 45A, 1 C/O               | 17D312DA0 |                     |

| <b>PTC Thermistor Relay Series</b><br><br> | Relay Type       | Description          | Cat. No. | M.R.P. (₹) Per Unit |
|-------------------------------------------------------------------------------------------------------------------------------|------------------|----------------------|----------|---------------------|
|                                                                                                                               | Thermistor Relay | 110 - 240 VAC, 2 C/O | MJ83BK   | 2910                |
|                                                                                                                               |                  | 220 - 440 VAC, 2 C/O | MJ93BK   | 2935                |
|                                                                                                                               |                  | 24 VAC/DC, 2 C/O     | MJA3BK   | 3405                |
|                                                                                                                               |                  | 110 - 240 VAC, 1 C/O | MJ81BK   | 2690                |
|                                                                                                                               |                  | 220 - 440 VAC, 1 C/O | MJ91BK   | 2730                |

## Hour Meter & Counter [9029]

| <b>Hour Meters</b><br><br> | Product Description                                                                                                                                                                                                                                               | Cat. No. | M.R.P. (₹) Per Unit |
|---------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|---------------------|
|                                                                                                               | HM36, 85 - 265 VAC Flush Mounting                                                                                                                                                                                                                                 | LA25F1   | 1110                |
|                                                                                                               | HM 36, 10 - 80 VDC Flush Mounting                                                                                                                                                                                                                                 | LD17F1   | 1685                |
|                                                                                                               | HM36, 92 - 264 / 270 - 460 VAC Base - DIN Mounting                                                                                                                                                                                                                | 30A6B1   | 1210                |
|                                                                                                               | HM36, 10 - 80 VDC Base/DIN Mounting                                                                                                                                                                                                                               | 30D1B1   | 1685                |
|                                                                                                               | Digital Hour Meter/Digital Counter (Resettable)                                                                                                                                                                                                                   | Z□□FB□   | 2020                |
|                                                                                                               | <b>Hour Meter / Counter</b> Z □ □ FB □<br><div> <div> <b>Voltage</b><br/> H 10 - 80 VDC<br/> 7 85 - 265 VAC<br/> J 12 - 48 VAC/DC </div> <div> 1 Hour Meter<br/> 2 Counter </div> <div> <b>Bezel</b><br/> A Round<br/> B 24 x 48<br/> C Screw Mount </div> </div> |          |                     |

## Earth Leakage Relay [9032]

| <b>Earth Leakage Relays</b><br><br><br><b>96 x 96 mm Earth Leakage Relay</b><br><br><br><b>DIN Mounted Earth Leakage Relay</b><br><br><br><b>CBCT</b><br><br><br><b>Rectangular CBCT</b> | Current Range | Type                                                | Voltage & Contact Arrangement                                   | Cat. No.   | M.R.P. (₹) Per Unit |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------------------------------------|-----------------------------------------------------------------|------------|---------------------|
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 30mA - 30A    | Panel mounted (96 x 96 mm) Earth Leakage Relay      | 110 - 240 VAC/DC, 1 C/O (Pre-alarm) + 1 C/O (Fault)             | 17K716QF4N | 5200                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |               |                                                     | 110 - 240 VAC/DC, 1 C/O (Pre-alarm) + 1 C/O (Fault) with RS 485 | 17K716QF4M | 7475                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |               |                                                     | 240 - 415 VAC/DC, 1 C/O (Pre-alarm) + 1 C/O (Fault)             | 17K726QF4N | 5200                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |               |                                                     | 240 - 415 VAC/DC, 1 C/O (Pre-alarm) + 1 C/O (Fault) with RS 485 | 17K726QF4M | 7475                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |               | DIN mounted Earth Leakage Relay                     | 110 - 240 VAC, 110 VDC, Manual reset                            | 17G715GF2  | 4665                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |               |                                                     | 220 - 415 VAC, 220 VDC, Manual reset                            | 17G745GF2  |                     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |               |                                                     | 110 - 240 VAC, 110 VDC, Auto reset                              | 17G715KF2  |                     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |               |                                                     | 220 - 415 VAC, 220 VDC, Auto reset                              | 17G745KF2  |                     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |               | CBCT (moulded case) for Type A & AC Current         | 38 mm ID                                                        | 17H7NNHN3  | 1600                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |               |                                                     | 57 mm ID                                                        | 17H7NNIN3  | 2160                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |               |                                                     | 70 mm ID                                                        | 17H7NNQN3  | 2460                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |               |                                                     | 92 mm ID                                                        | 17H7NNJN3  | 2690                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |               |                                                     | 120 mm ID                                                       | 17H7NNLN3  | 2805                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |               |                                                     | 210 mm ID                                                       | 17H7NNKN3  | 5290                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |               | CBCT (moulded case) for Type AC Current             | 38 mm ID                                                        | 17H7NNRN3  | 1200                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |               |                                                     | 57 mm ID                                                        | 17H7NNVN3  | 1340                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |               |                                                     | 70 mm ID                                                        | 17H7NNSN3  | 1420                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |               |                                                     | 92 mm ID                                                        | 17H7NNTN3  | 1905                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |               |                                                     | 120 mm ID                                                       | 17H7NNUN3  | 2205                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |               | Rectangular CBCT (moulded case) for Type AC Current | 300 x 50 mm ID                                                  | 17H9NNWN0  | 10570               |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |               |                                                     | 350 x 150 mm ID                                                 | 17H9NNXN0  | 12850               |

\* - Available till stock lasts.

- › CBCT for Type AC : For applications with sinusoidal alternating current from 30mA to 30A.
- › CBCT for Type A and AC : For applications with sinusoidal alternating current (from 30mA to 30A) & pulsating DC current (from 30mA to 3A).
- › Please contact nearest branch office for requirements of higher dimension CBCTs.

These products are manufactured by



Disclaimer for Timing Devices and Supply Monitors

Every effort as to the correctness or sufficiency of the information and data contained in the catalogue is made. We however cannot accept any liability for the accuracy or completeness of the information and data provided. No claims in this regard shall consequently be accepted.

We reserve the right to make changes, without prior notice, in the catalogue.

Products with CAT no. having, with or without, dot as suffix are same.



# Elevate Your Panels with **superior illumination** **& aesthetic**



LED Indicators

*Built on Trust.* Designed for high performance.

LEDs with Inbuilt low voltage glow protection at 25% of rated voltage to avoid false indication due to stray voltages.

---

LEDs with >180 degree viewing angle for enhanced experience with uniform illumination.

# Modular Remote Control Units

**Note :** All Cat.No. to be ordered in multiple of Standard Packing : 10, Except for Push Button Stations.

## Gen Next Series

### Gen Next Pro LED Indicator [8531]

› Surface Mounted Device LED technology

› Low Power consumption < 1W

› Surge & Low Voltage Glow Protection (LVGP)

|                                                                                                                                 | Description                        | Cat. No. | Colour (4 <sup>th</sup> Digit)                               | Voltage (5 <sup>th</sup> , 6 <sup>th</sup> , 7 <sup>th</sup> & 8 <sup>th</sup> Digit)                                                                                    | M.R.P. (₹) Per Unit            |
|---------------------------------------------------------------------------------------------------------------------------------|------------------------------------|----------|--------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|
|  <p>Ø22.5 mm</p> <p>Ø28<br/>Ø22.5<br/>(13)</p> | Gen Next Pro LED Indicator 22.5 mm | EPL□□□□  | R-Red<br>G-Green<br>Y-Yellow<br>A-Amber<br>B-Blue<br>W-White | 012C - 12 VAC/DC<br>024C - 24 VAC/DC<br>030C - 30 VAC/DC<br>048C - 48 VAC/DC<br>064C - 64 VAC/DC<br>110A - 110 VAC<br>110D - 110 VDC<br>240A - 240 VAC<br>220D - 220 VDC | 167<br><br>287<br>Blue & White |
|                                                                                                                                 |                                    |          |                                                              | 415A - 415 VAC                                                                                                                                                           | 209<br>354<br>Blue & White     |
|  <p>Ø16 mm</p> <p>Ø19.9<br/>Ø16<br/>Ø2</p>   | Gen Next Pro LED Indicator 16 mm   | SPL□□□□  | R-Red<br>G-Green<br>Y-Yellow<br>A-Amber<br>B-Blue<br>W-White | 012C - 12 VAC/DC<br>024C - 24 VAC/DC<br>110C - 110 VAC/DC<br>240A - 240 VAC                                                                                              | 195<br><br>324<br>Blue & White |

**Note \*** : LED Indicator for Flame Proof Panel application available on request.

### Universal LED Indicator [8531]

|                                                                                                                                                                                | Description                          | Cat. No. | Colour (8 <sup>th</sup> Digit)                               | Voltage (9 <sup>th</sup> , 10 <sup>th</sup> , 11 <sup>th</sup> & 12 <sup>th</sup> Digit) | M.R.P. (₹) Per Unit            |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|----------|--------------------------------------------------------------|------------------------------------------------------------------------------------------|--------------------------------|
|  <p>Gen Next Pro<br/>Ø22.5 mm<br/>Universal LED Indicator</p> <p>Ø28<br/>Ø22.5<br/>(13)</p> | Gen Next Pro Universal LED indicator | EPL□□□□  | R-Red<br>G-Green<br>Y-Yellow<br>A-Amber<br>B-Blue<br>W-White | 224C-24 to 240V AC/DC                                                                    | 497<br><br>597<br>Blue & White |






## 16mm Pro LED Indicators

Compact in Design. Superior in Aesthetics.  
Perfectly Crafted for Small-Size Panels.







## Gen Next Push Button & Selector Actuators Ø 22.5 mm [8538]

› Snap Mounting with compact contact blocks (EC1C & EC2C) › Max 3 row x 3 column stackable contact blocks

|                                                                                                                                                                            | Description                          | Cat. No.                                                                                                                 | Colour (4 <sup>th</sup> Digit)                                                    | M.R.P. (₹) Per Unit |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|--------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|---------------------|
| <br>     | Flush Head                           | EMN□FD1                                                                                                                  | R-Red<br>G-Green<br>C-Black<br>Y-Yellow<br>W-White<br>B-Blue<br>A-Amber<br>F-Gray | 106                 |
| <br>     | Projecting Head Push Function        | EMN□PD1                                                                                                                  | R-Red<br>G-Green<br>C-Black<br>Y-Yellow<br>W-White<br>B-Blue<br>A-Amber<br>F-Gray | 107                 |
| <br>     | Mushroom Head 'Push - Turn Function' | EMN□MH1                                                                                                                  | R-Red<br>G-Green<br>C-Black<br>Y-Yellow                                           | 208                 |
| <br>     | Mushroom Head 'Push - Function'      | EMN□MD1                                                                                                                  | R-Red<br>G-Green<br>C-Black<br>Y-Yellow                                           | 151                 |
| <br>   | Symmetric Head                       | <b>2 Position</b>                                                                                                        | R-Red<br>G-Green<br>C-Black<br>W-White                                            | 295                 |
|                                                                                                                                                                            |                                      |  Non Spring Return<br>EP09SK00□0000     |                                                                                   |                     |
|                                                                                                                                                                            |                                      |  Spring Return<br>EP09SI00□0000         |                                                                                   |                     |
|                                                                                                                                                                            |                                      | <b>3 Position</b>                                                                                                        |                                                                                   | 312                 |
|                                                                                                                                                                            |                                      |  Non Spring Return<br>EP09SL00□0000   |                                                                                   |                     |
|                                                                                                                                                                            |                                      |  Spring Return<br>EP09SJ00□0000       |                                                                                   |                     |
|                                                                                                                                                                            |                                      |  Spring Return L. H.<br>EP09SM00□0000 |                                                                                   |                     |
|                                                                                                                                                                            |                                      |  Spring Return R. H.<br>EP09SN00□0000 |                                                                                   |                     |
| <br> | Lever Head                           | <b>2 Position</b>                                                                                                        | R-Red<br>W-White<br>C-Black                                                       | 295                 |
|                                                                                                                                                                            |                                      |  Non Spring Return<br>EMN□LK1         |                                                                                   |                     |
|                                                                                                                                                                            |                                      |  Spring Return<br>EMN□LI1             |                                                                                   |                     |
|                                                                                                                                                                            |                                      | <b>3 Position</b>                                                                                                        |                                                                                   | 312                 |
|                                                                                                                                                                            |                                      |  Non Spring Return<br>EMN□LL1         |                                                                                   |                     |
|                                                                                                                                                                            |                                      |  Spring Return<br>EMN□LJ1             |                                                                                   |                     |
|                                                                                                                                                                            |                                      |  Spring Return L. H.<br>EMN□LM1       |                                                                                   |                     |
|                                                                                                                                                                            |                                      |  Spring Return R. H.<br>EMN□LN1       |                                                                                   |                     |



## Gen Next Push Button & Selector Actuators Ø 22.5 mm [8538]

|   | Description                         | Cat. No.                                                                                                               | Colour (4 <sup>th</sup> Digit) | M.R.P. (₹) Per Unit |
|------------------------------------------------------------------------------------|-------------------------------------|------------------------------------------------------------------------------------------------------------------------|--------------------------------|---------------------|
|                                                                                    | Lock & Key Rotary Type              | 2 Position                                                                                                             | C-Black                        | 425                 |
|                                                                                    |                                     |  Non Spring Return<br>EP09KK00□0000   |                                |                     |
|                                                                                    |                                     |  Spring Return<br>EP09KI00□0000       |                                |                     |
|                                                                                    |                                     | 3 Position                                                                                                             |                                |                     |
|                                                                                    |                                     |  Non Spring Return<br>EP09KL00□0000   |                                | 443                 |
|                                                                                    |                                     |  Spring Return<br>EP09KJ00□0000       |                                |                     |
|                                                                                    |                                     |  Spring Return L. H.<br>EP09KM00□0000 |                                |                     |
|                                                                                    |                                     |  Spring Return R. H.<br>EP09KN00□0000 |                                |                     |
|   | Push Pull                           | EG02MG0□                                                                                                               | R-Red                          | 408                 |
|   | Mushroom Head Lock And Key Actuator | EG02MQ0R00                                                                                                             | R-Red                          | 462                 |
|  | Twin Touch with Black centre strip  | EG02TD0I                                                                                                               | —                              | 211                 |




Brass Metal Coller Push Button

- Note :** 1. Actuators & Selector Actuators with black ABS collar are offered as Standard  
 2. Actuators (except Mushroom Head Push - Pull Actuators) are also available with chrome plated ABS & Brass collar
- Non-Illuminated Actuator
- For PU Coated ABS Collar replace 7th digit 1 by 2 eg. : EMNPD[2]
  - For Brass Metal Collar replace 7th digit 1 by 3 eg. : EMNPD[3] (Please contact nearest branch office for MRP)
- Illuminated Actuator
- For PU Coated ABS Collar replace 4th digit 3 by 5 eg. : EG0[5]\*\*\*
  - For Brass Metal Collar replace 4th digit 3 by 7 eg. : EG0[7]\*\*\* (Please contact nearest branch office for MRP)

**Note \*** : In 2 position selector actuator, for operating style  replace 6th digit from K to R and for operating style , replace 6th digit from K to T




## Stack smart control more

Operate nine contact blocks with just **one** push button

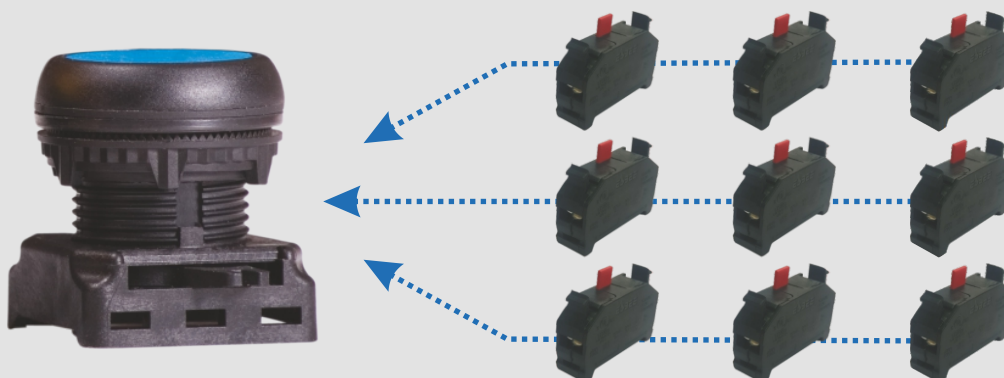

## Gen Next Illuminated Push Button Actuators [8531]

› Snap Mounting with compact contact blocks (EC1C & EC2C)

|                                                                                                                                                                     | Description                       | Cat. No.                          | Colour (8 <sup>th</sup> Digit)                               | Voltage (9 <sup>th</sup> , 10 <sup>th</sup> , 11 <sup>th</sup> & 12 <sup>th</sup> Digit)                                                                                 | M.R.P. (₹) Per Unit   |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|-----------------------------------|--------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|
|   | Flush Head                        | EG03FDL□□□□□                      | R-Red<br>G-Green<br>Y-Yellow<br>A-Amber                      | 012C - 12 VAC/DC<br>024C - 24 VAC/DC<br>030C - 30 VAC/DC<br>048C - 48 VAC/DC<br>064C - 64 VAC/DC<br>110A - 110 VAC<br>110D - 110 VDC<br>240A - 240 VAC<br>220D - 220 VDC | 300                   |
|                                                                                                                                                                     |                                   |                                   | B-Blue<br>W-White                                            |                                                                                                                                                                          | 555<br>Blue and White |
|   | Projecting Head (Push Function)   | EG03PDL□□□□□                      | R-Red<br>G-Green<br>Y-Yellow<br>A-Amber                      | 012C - 12 VAC/DC<br>024C - 24 VAC/DC<br>030C - 30 VAC/DC<br>048C - 48 VAC/DC<br>064C - 64 VAC/DC<br>110A - 110 VAC<br>110D - 110 VDC<br>240A - 240 VAC<br>220D - 220 VDC | 300                   |
|                                                                                                                                                                     |                                   |                                   | B-Blue<br>W-White                                            |                                                                                                                                                                          | 555<br>Blue and White |
|   | Selector Actuator with LED holder | 2 Position                        | R-Red<br>G-Green<br>Y-Yellow<br>A-Amber<br>B-Blue<br>W-White | 012C - 12 VAC/DC<br>024C - 24 VAC/DC<br>030C - 30 VAC/DC<br>048C - 48 VAC/DC<br>064C - 64 VAC/DC<br>110A - 110 VAC<br>110D - 110 VDC<br>240A - 240 VAC<br>220D - 220 VDC | 439                   |
|                                                                                                                                                                     |                                   | Non Spring Return<br>EG03SKL□□□□□ |                                                              |                                                                                                                                                                          |                       |
|                                                                                                                                                                     |                                   | Spring Return<br>EG03SIL□□□□□     |                                                              |                                                                                                                                                                          |                       |
|                                                                                                                                                                     |                                   | 3 Position                        |                                                              |                                                                                                                                                                          |                       |
|                                                                                                                                                                     |                                   | Non Spring Return<br>EG03SLL□□□□□ |                                                              |                                                                                                                                                                          |                       |
|                                                                                                                                                                     | Twin Touch with Led Holder        | EG03TDL□□□□□                      | Y- Yellow<br>A-Amber                                         | 012C - 12 VAC/DC<br>024C - 24 VAC/DC<br>030C - 30 VAC/DC<br>048C - 48 VAC/DC<br>064C - 64 VAC/DC<br>110A - 110 VAC<br>110D - 110 VDC<br>240A - 240 VAC<br>220D - 220 VDC | 376                   |
|                                                                                                                                                                     |                                   |                                   |                                                              |                                                                                                                                                                          |                       |

**Note\*** : 1) In 2 position selector actuator, for operating style  replace 6th digit from K to R and for operating style  replace 6th digit from K to T.

2) Assembly comes with LED holder. Please order contact block EC1C and EC2C separately.




## Flush Head Push Button

Sleek, low-profile design enabling effortless operation in modern panel environments



## GEN NEXT Metal Push Button & Selector Actuator [8538]

› Snap Mounting with compact contact blocks (EC1C & EC2C)

|                                                                                     | Description                 | Cat. No.                          | Colour                                                                  | M.R.P. (₹)<br>Per Unit |
|-------------------------------------------------------------------------------------|-----------------------------|-----------------------------------|-------------------------------------------------------------------------|------------------------|
|                                                                                     |                             |                                   |                                                                         |                        |
|    | Flush head                  | EM27FD00□00                       | R-Red<br>G-Green<br>C-Black<br>Y-Yellow<br>W-White<br>B-Blue<br>A-Amber | 112                    |
|                                                                                     |                             | EM27FD00□00                       |                                                                         |                        |
|                                                                                     |                             | EM27FD00□00                       |                                                                         |                        |
|                                                                                     |                             | EM27FD00□00                       |                                                                         |                        |
|                                                                                     |                             | EM27FD00□00                       |                                                                         |                        |
|                                                                                     |                             | EM27FD00□00                       |                                                                         |                        |
|                                                                                     |                             | EM27FD00□00                       |                                                                         |                        |
|    | Symmetric Head              | 2 Position                        | C-Black                                                                 | 332                    |
|                                                                                     |                             | Non Spring Return EM27SK00□00 ↗   |                                                                         |                        |
|                                                                                     |                             | Spring Return EM27SI00□00 ↘       |                                                                         |                        |
|                                                                                     |                             | 3 Position                        |                                                                         | 375                    |
|                                                                                     |                             | Non Spring Return EM27SL00□00 ↘↗  |                                                                         |                        |
|                                                                                     |                             | Spring Return EM27SJ00□00 ↘↗      |                                                                         |                        |
|                                                                                     |                             | Spring Return L.H. EM27SM00□00 ↘↗ |                                                                         |                        |
|                                                                                     |                             | Spring Return R.H. EM27SN00□00 ↘↗ |                                                                         |                        |
|  | Lock & Key                  | 2 Position                        | C-Black                                                                 | 456                    |
|                                                                                     |                             | Non Spring Return EM27KK00□00 ↗   |                                                                         |                        |
|                                                                                     |                             | Spring Return EM27KI00□00 ↘       |                                                                         |                        |
|                                                                                     |                             | 3 Position                        |                                                                         | 505                    |
|                                                                                     |                             | Non Spring Return EM27KL00□00 ↘↗  |                                                                         |                        |
|                                                                                     |                             | Spring Return EM27KJ00□00 ↘↗      |                                                                         |                        |
|                                                                                     |                             | Spring Return L.H. EM27KM00□00 ↘↗ |                                                                         |                        |
|                                                                                     |                             | Spring Return R.H. EM27KN00□00 ↘↗ |                                                                         |                        |
|  | Mushroom Head-Push Turn     | EM27MH00□00                       | R-Red                                                                   | 253                    |
|                                                                                     |                             | EM27MH00□00                       | G-Green                                                                 |                        |
|                                                                                     | Mushroom Head-Push Function | EM27MD00□00                       | R-Red                                                                   | 167                    |


## Mushroom Head Push Button

Rapid, reliable emergency response at the push of a button—engineered for moments when every second matters





## GEN NEXT Metal Illuminated Push Button Actuator [8531]

|                                                                                   | Description            | Cat. No.     | Colour (8 Digit)  | Voltage (9 , 10 , 11 & 12 Digit) | M.R.P. (₹) Per Unit |
|-----------------------------------------------------------------------------------|------------------------|--------------|-------------------|----------------------------------|---------------------|
|  | Illuminated Flush head | EM28FD0□□□□□ | R-Red             | 012C - 12 V AC/DC                | 381                 |
|                                                                                   |                        |              | G-Green           | 024C - 24 V AC/DC                |                     |
|                                                                                   |                        |              | Y-Yellow          | 030C - 30 V AC/DC                |                     |
|                                                                                   |                        |              | A-Amber           | 048C - 48 V AC/DC                |                     |
|                                                                                   |                        |              | W-White<br>B-Blue | 064C - 64 V AC/DC                | 786                 |
|                                                                                   |                        |              |                   | 110A - 110 V AC                  |                     |
|                                                                                   |                        |              |                   | 110D - 110 V DC                  |                     |
|                                                                                   |                        |              |                   | 240A - 240 V AC                  |                     |
|                                                                                   |                        |              |                   | 220D - 220 V DC                  |                     |

## Gen Next Modular Contact Blocks [8538]

|                                                                                   | Description | Cat. No. | Colour | Voltage | M.R.P. (₹) Per Unit |
|-----------------------------------------------------------------------------------|-------------|----------|--------|---------|---------------------|
|  | 'NO' Block  | EC1C     | –      | –       | 84                  |
|                                                                                   | 'NC' Block  | EC2C     | –      | –       | 84                  |

## Spare for Gen Next Series [8531]

|                                                                                     | Description                                         | Cat. No.     | Colour            | Voltage          | M.R.P. (₹) Per Unit   |
|-------------------------------------------------------------------------------------|-----------------------------------------------------|--------------|-------------------|------------------|-----------------------|
|  | LED Holder for Gen Next illuminated actuator series | EG08HOL□□□□□ | R-Red             | 012C - 12 VAC/DC | 225                   |
|                                                                                     |                                                     |              | G-Green           | 024C - 24 VAC/DC |                       |
|                                                                                     |                                                     |              | Y-Yellow          | 030C - 30 VAC/DC |                       |
|                                                                                     |                                                     |              | A-Amber           | 048C - 48 VAC/DC |                       |
|                                                                                     |                                                     |              | B-Blue<br>W-White | 064C - 64 VAC/DC | 449<br>Blue and White |
|                                                                                     |                                                     |              |                   | 110A - 110 VAC   |                       |
|                                                                                     |                                                     |              |                   | 110D - 110 VDC   |                       |
|                                                                                     |                                                     |              |                   | 240A - 240 VAC   |                       |
|                                                                                     |                                                     |              |                   | 220D - 220 VDC   |                       |

**Note :** Contact blocks and LED holder are same for Gen next and Gen next META series







## Selector Switch

Engineered for smooth selection and accurate operational command across systems




## Gen Next integral Actuator [8536]

› With inbuilt contact arrangement › Contact rating 6A @ 240AC

|                                                                                                                                                                         | Description                      | Cat. No.                                                                                                           | Contact Configuration<br>(3 <sup>rd</sup> Digit)                                | Colour<br>(4 <sup>th</sup> Digit)       | M.R.P. (₹)<br>Per Unit |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|--------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|-----------------------------------------|------------------------|
|       | Flush Head                       | EE□□FD1                                                                                                            | 1 - 1 NO<br>2 - 1 NC                                                            | R-Red<br>G-Green<br>Y-Yellow            | 165                    |
|                                                                                                                                                                         |                                  |                                                                                                                    | 3 - 1 NO + 1 NC<br>4 - 2 NO<br>5 - 2 NC                                         | W-White<br>B-Blue<br>A-Amber<br>C-Black | 239                    |
|       | Projecting Head<br>Push Function | EE□□PD1                                                                                                            | 1 - 1 NO<br>2 - 1 NC                                                            | R-Red<br>G-Green<br>Y-Yellow            | 165                    |
|                                                                                                                                                                         |                                  |                                                                                                                    | 3 - 1 NO + 1 NC<br>4 - 2 NO<br>5 - 2 NC                                         | W-White<br>B-Blue<br>A-Amber<br>C-Black | 239                    |
|       | Mushroom Head<br>Push - Turn     | EE□□MH1                                                                                                            | 1 - 1 NO<br>2 - 1 NC                                                            | R-Red<br>G-Green<br>Y-Yellow            | 240                    |
|                                                                                                                                                                         |                                  |                                                                                                                    | 3 - 1 NO + 1 NC<br>4 - 2 NO<br>5 - 2 NC                                         | C-Black                                 | 327                    |
|     | Mushroom Head<br>Push - Function | EE□□MD1                                                                                                            | 1 - 1 NO<br>2 - 1 NC                                                            | R-Red<br>G-Green<br>Y-Yellow            | 204                    |
|                                                                                                                                                                         |                                  |                                                                                                                    | 3 - 1 NO + 1 NC<br>4 - 2 NO<br>5 - 2 NC                                         | C-Black                                 | 277                    |
|   | Symmetric Head<br>Actuator       | 2 Position                                                                                                         | 1 - 1 NO<br>2 - 1 NC                                                            | R-Red<br>G-Green<br>W-White<br>C-Black  | 330                    |
|                                                                                                                                                                         |                                  |  Non Spring Return<br>EE□□SK1   | 3 - 1 NO + 1 NC (Left NO)<br>4 - 2 NO<br>5 - 2 NC<br>6 - 1 NO + 1 NC (Right NO) |                                         | 405                    |
|                                                                                                                                                                         |                                  |  Spring Return<br>EE□□SI1       |                                                                                 |                                         |                        |
|                                                                                                                                                                         |                                  | 3 Position                                                                                                         | 3 - 1 NO + 1 NC (Left NO)<br>4 - 2 NO<br>5 - 2 NC<br>6 - 1 NO + 1 NC (Right NO) | R-Red<br>G-Green<br>W-White<br>C-Black  | 417                    |
|                                                                                                                                                                         |                                  |  Non Spring Return<br>EE□□SL1   |                                                                                 |                                         |                        |
|                                                                                                                                                                         |                                  |  Spring Return<br>EE□□SJ1       |                                                                                 |                                         |                        |
|                                                                                                                                                                         |                                  |  Spring Return L. H.<br>EE□□SM1 |                                                                                 |                                         |                        |
|                                                                                                                                                                         |                                  |  Spring Return R. H.<br>EE□□SN1 |                                                                                 |                                         |                        |
|   | Lever Head                       | 2 Position                                                                                                         | 1 - 1 NO<br>2 - 1 NC                                                            | R-Red<br>G-Green<br>W-White<br>C-Black  | 330                    |
|                                                                                                                                                                         |                                  |  Non Spring Return<br>EE□□LK1   | 3 - 1 NO + 1 NC (Left NO)<br>4 - 2 NO<br>5 - 2 NC<br>6 - 1 NO + 1 NC (Right NO) |                                         | 405                    |
|                                                                                                                                                                         |                                  |  Spring Return<br>EE□□LI1       |                                                                                 |                                         |                        |
|                                                                                                                                                                         |                                  | 3 Position                                                                                                         | 3 - 1 NO + 1 NC (Left NO)<br>4 - 2 NO<br>5 - 2 NC<br>6 - 1 NO + 1 NC (Right NO) | R-Red<br>G-Green<br>W-White<br>C-Black  | 417                    |
|                                                                                                                                                                         |                                  |  Non Spring Return<br>EE□□LL1   |                                                                                 |                                         |                        |
|                                                                                                                                                                         |                                  |  Spring Return<br>EE□□LJ1       |                                                                                 |                                         |                        |
|                                                                                                                                                                         |                                  |  Spring Return L. H.<br>EE□□LM1 |                                                                                 |                                         |                        |
|                                                                                                                                                                         |                                  |  Spring Return R. H.<br>EE□□LN1 |                                                                                 |                                         |                        |

## Gen Next integral Actuator [8536]

|  | Description            | Cat. No.                                                                                                         | Contact Configuration (3 <sup>rd</sup> Digit)                                   | Colour (4 <sup>th</sup> Digit) | M.R.P. (₹) Per Unit |
|-----------------------------------------------------------------------------------|------------------------|------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|--------------------------------|---------------------|
|                                                                                   | Lock & Key Rotary Type | <b>2 Position</b>                                                                                                | 1 - 1 NO<br>2 - 1 NC                                                            | C-Black                        | 423                 |
|                                                                                   |                        |  Non Spring Return<br>EE□□KK1   | 3 - 1 NO + 1 NC (Left NO)<br>4 - 2 NO<br>5 - 2 NC<br>6 - 1 NO + 1 NC (Right NO) |                                | 505                 |
|                                                                                   |                        |  Spring Return<br>EE□□KI1       |                                                                                 |                                |                     |
|                                                                                   |                        | <b>3 Position</b>                                                                                                |                                                                                 | C-Black                        | 517                 |
|                                                                                   |                        |  Non Spring Return<br>EE□□KL1   |                                                                                 |                                |                     |
|                                                                                   |                        |  Spring Return<br>EE□□KJ1       | 3 - 1 NO + 1 NC (Left NO)<br>4 - 2 NO<br>5 - 2 NC<br>6 - 1 NO + 1 NC (Right NO) |                                |                     |
|                                                                                   |                        |  Spring Return L. H.<br>EE□□KM1 |                                                                                 |                                |                     |
|                                                                                   |                        |  Spring Return R. H.<br>EE□□KN1 |                                                                                 |                                |                     |

**Note \*** : In 2 position selector actuator, for operating style  replace 6th digit from K to R and for operating style  replace 6th digit from K to T

## Panel Mounted Buzzer Ø 22.5 mm [8531]

› IP20 protection    › 80dB at 1 m distance    › Low Power consumption < 0.6W

|  | Description                                  | Electrical Rating | Cat. No.<br>Round Type | M.R.P. (₹) Per Unit |
|-------------------------------------------------------------------------------------|----------------------------------------------|-------------------|------------------------|---------------------|
|                                                                                     | 22.5 mm Panel Mounted Buzzer<br>Black colour | 240 VAC           | EG15R00C240A           | 396                 |
|                                                                                     |                                              | 110 VAC           | EG15R00C110A           |                     |
|                                                                                     |                                              | 64 VAC/DC         | EG15R00C064C           |                     |
|                                                                                     |                                              | 48 VAC/DC         | EG15R00C048C           |                     |
|                                                                                     |                                              | 30 VAC/DC         | EG15R00C030C           |                     |
|                                                                                     |                                              | 24 VAC/DC         | EG15R00C024C           |                     |
|                                                                                     |                                              | 12 VAC/DC         | EG15R00C012C           |                     |

## Gen Next Push Button Stations [8536]

Dimension › Single Station : 65 x 55 x 33 mm    › Two Station : 100 x 55 x 53 mm  
› Three Station : 134 x 55 x 53 mm    › Eight Station : 305 x 55 x 53 mm

|  | Description                                                                                    | Cat. No. | M.R.P. (₹) Per Unit |
|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|----------|---------------------|
|                                                                                     | Flush Head Actuator - Red with Legend - STOP<br>Contact - 1 'NC'                               | EP1FAC01 | 642                 |
|                                                                                     | Flush Head Actuator - Green with Legend - START<br>Contact - 1 'NO'                            | EP1FAB02 |                     |
|  | Two Position Symmetric Head Selector Switch -<br>Black with Legend - OFF / ON Contact - 1 'NO' | EP1FAF08 | 843                 |
|  | Two Position Lock & Key Rotary Switch with<br>Legend - OFF / ON Contact - 1 'NO'               | EP1FAF12 | 930                 |
|  | Mushroom Head Actuator 'Push Function'<br>with Legend - STOP Contact - 1 'NC' for Stop         | EP1FAC03 | 681                 |



## Gen Next Push Button Stations [8536]

|                                                                                     | Description                                                                               | Cat. No.      | M.R.P. (₹)<br>Per Unit |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|---------------|------------------------|
|    | Mushroom Head Actuator 'Push Turn Type' with Legend - STOP Contact - 1 'NC' for Stop      | EP1FAC05      | 830                    |
|    | Flush Head Actuator - Green with Legend - START Contact - 1 'NO' (Station One)            | EP2FAH0201    | 930                    |
|                                                                                     | Flush Head Actuator - Red with Legend - STOP Contact - 1 'NC'                             |               |                        |
|    | Flush Head Actuator - Green with Legend - START Contact - 1 'NO' (Station One)            | EP2FAH0205    | 1029                   |
|                                                                                     | Mushroom Head Actuator 'Push Turn Type' with Legend - STOP Contact - 1 'NC' (Station Two) |               |                        |
|    | LED Indicator 240 VAC - Red (Station One)                                                 | EP3FAUI1X0201 | 1253                   |
|                                                                                     | Flush Head Actuator - Green with Legend - START Contact - 1 'NO' (Station Two)            |               |                        |
|                                                                                     | Flush Head Actuator - Red with Legend - STOP Contact - 1 'NC' (Station Three)             |               |                        |
|   | Flush Head Actuator - Green with Legend - FORWARD Contact - 1 'NO' (Station Two)          | EP3FAR020102  | 1173                   |
|                                                                                     | Flush Head Actuator - Red with Legend - STOP Contact - 1 'NC' (Station Two)               |               |                        |
|                                                                                     | Flush Head Actuator - Green with Legend - REVERSE Contact - 1 'NO' (Station Three)        |               |                        |
|  | Flush Head Actuator - Green with Legend - UP Contact - 1 'NO' (Station Two)               | EP3FAS020102  | 1173                   |
|                                                                                     | Flush Head Actuator - Red with Legend - STOP Contact - 1 'NC' (Station Two)               |               |                        |
|                                                                                     | Flush Head Actuator - Green with Legend - DOWN Contact - 1 'NO' (Station Three)           |               |                        |
|  | All 7 Flush Head Actuators with NO Contact & Mushroom Head Push Turn                      | EP8F02        | 3328                   |
|                                                                                     | 8 Way push button pendant with hanging provision                                          | EP8F04        | 3559                   |
|                                                                                     | Single Station Enclosure Box without Actuator                                             | EP1FAA*       | 355                    |
|                                                                                     | Two Station Enclosure Box without Actuator                                                | EP2FAA*       | 377                    |
|                                                                                     | Three Station Enclosure Box without Actuator                                              | EP3FAA*       | 388                    |
|                                                                                     | Eight Station Enclosure Box without Actuator                                              | EP8FAA*       | 648                    |

**Note :** 1. All Gen next push button stations contains integral Actuators.  
2. Only integral actuators can be used for converting Gen next enclosure boxes into Gen Next push button station.  
3. For any other combination of actuators/indicators in push button stations please contact nearest branch office.  
4. EP8F04 is available in single speed for crane application.  
\* Chapter ID : 8538.

## Universal Push Button Stations (in ABS Engineering plastic body) [8536]

Dimension > Single Station : 75 x 75 x 56 mm > Two Station : 127 x 75 x 56 mm  
> Three Station : 160 x 75 x 56 mm

|                                                                                     | Description                                                                                                                                                                                                                                                                 | Cat. No.     | M.R.P. (₹)<br>Per Unit |
|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|------------------------|
|    | Flush Head Actuator - Red with Laser Marking - STOP Contact - 1 'NC'                                                                                                                                                                                                        | EWS1C01AC062 | 775                    |
|    | Flush Head Actuator - Green with Laser Marking - START Contact - 1 'NO'                                                                                                                                                                                                     | EWS1C01AC063 | 775                    |
|    | Two Position Symmetric Head Selector Switch - Black with Laser Marking - OFF / ON Contact - 1 'NO'                                                                                                                                                                          | EWS1C01AF064 | 1023                   |
|    | Illuminated Actuator - Green with Laser Marking - ON Contact - 1 'NO' - 240 VAC                                                                                                                                                                                             | EWS1C01AA070 | 914                    |
|    | Two Position Lock & Key Rotary Switch with Laser Marking - OFF / ON Contact - 1 'NO'                                                                                                                                                                                        | EWS1C01AF065 | 1156                   |
|    | Mushroom Head Actuator 'Push Function' with Laser Marking - STOP Contact - 1 'NC' for Stop                                                                                                                                                                                  | EWS1C13AC054 | 823                    |
|    | Mushroom Head Actuator 'Push Turn type' with Laser Marking - STOP Contact - 1 'NC' for Stop                                                                                                                                                                                 | EWS1C13AC051 | 929                    |
|    | "Mushroom Head Actuator with Lock and Key on Yellow Cover, with Laser Marking - STOP, Contact - 1 'NC' for Emergency Stop"                                                                                                                                                  | EWS1C13AC066 | 1130                   |
|  | Push Button Station with Push Pull Emergency Switch, Red with 1 NC                                                                                                                                                                                                          | EWS1C13AC069 | 1004                   |
|  | Flush Head Actuator - Green with Laser Marking - START Contact - 1 'NO' (Station One)<br>Flush Head Actuator - Red with Laser Marking - STOP Contact - 1 'NC' (Station Two)"                                                                                                | EWS2C01AH045 | 1118                   |
|  | Flush Head Actuator - Green with Laser Marking - START Contact - 1 'NO' (Station One)<br>Mushroom Head Actuator 'Push Turn Type' with Laser Marking - TOP Contact - 1 'NC'"                                                                                                 | EWS2C01AH067 | 1239                   |
|  | Flush Head Actuator - Green with Laser Marking - START Contact - 1 'NO' (Station One)<br>Mushroom Head Actuator 'Lock & Key Type' with Laser Marking - STOP Contact - 1 'NC'"                                                                                               | EWS2C01AH068 | 1463                   |
|  | Pilot Light 240 VAC White (Station One)<br>Flush Head Actuator - Green with Laser Marking - START Contact - 1 'NO' (Station Two)<br>Flush Head Actuator - Red with Laser Marking - STOP Contact - 1 'NC' (Station Three)"                                                   | EWS3C01AH048 | 1514                   |
|  | Flush Head Actuator - Green with Laser Marking - FORWARD Contact - 1 'NO' (Station One)<br>Flush Head Actuator - Red with Laser Marking - STOP Contact - 1 'NC' (Station Two)<br>Flush Head Actuator - Green with Laser Marking - REVERSE Contact - 1 'NO' (Station Three)" | EWS3C01BJ055 | 1420                   |
|  | Flush Head Actuator - Green with Laser Marking - UP Contact - 1 'NO' (Station One)<br>Flush Head Actuator - Red with Laser Marking - STOP Contact - 1 'NC' (Station Two)<br>Flush Head Actuator - Green with Laser Marking - DOWN Contact - 1 'NO' (Station Three)"         | EWS3C01AS055 | 1420                   |

## Universal Push Button Stations (in ABS Engineering plastic body) [8538]

### Push Buttons Station Enclosure

Dimension > Single Station : 75 x 75 x 56 mm > Two Station : 127 x 75 x 56 mm  
> Three Station : 160 x 75 x 56 mm > Four Station : 215 x 75 x 70 mm  
> Five Station : 270 x 75 x 71 mm

|  | Description                                | Cat. No.  | M.R.P. (₹) Per Unit |
|-----------------------------------------------------------------------------------|--------------------------------------------|-----------|---------------------|
|                                                                                   | Enclosure Grey-Black single hole           | EWS1C01AA | 452                 |
|                                                                                   | Enclosure Grey-Black & 2 hole of Ø 22.5    | EWS2C01AA | 585                 |
|                                                                                   | Enclosure Grey-Black & 3 holes of Ø 22.5   | EWS3C01AA | 717                 |
|                                                                                   | Enclosure Grey-Black & 4 holes of Ø 22.5   | EWS4C01AA | 1005                |
|                                                                                   | Enclosure Grey-Black & 5 holes of Ø 22.5   | EWS5C01AA | 1160                |
|  | Enclosure Yellow-Black single hole         | EWS1C13AA | 452                 |
|                                                                                   | Enclosure Yellow-Black & 2 hole of Ø 22.5  | EWS2C13AA | 585                 |
|                                                                                   | Enclosure Yellow-Black & 3 holes of Ø 22.5 | EWS3C13AA | 717                 |
|                                                                                   | Enclosure Yellow-Black & 4 holes of Ø 22.5 | EWS4C13AA | 1005                |
|                                                                                   | Enclosure Yellow-Black & 5 holes of Ø 22.5 | EWS5C13AA | 1160                |

### All Purpose Enclosures [8538]

Dimension: 110 x 80 x 65 mm

| <br><b>Note : with plastic screws</b> | Description                  | Cat. No. | M.R.P. (₹) Per Unit |
|-------------------------------------------------------------------------------------------------------------------------|------------------------------|----------|---------------------|
|                                                                                                                         | All Grey without hole        | HF999000 | 448                 |
|                                                                                                                         | All Grey & 1 hole of Ø 22.5  | HF999001 |                     |
|                                                                                                                         | All Grey & 2 holes of Ø 22.5 | HF999002 |                     |

**Note :** Gen Next Series actuator and contact blocks can be used to convert all purpose enclosure box into push button stations.

### Accessories and Spares [8538]

| <br><b>Metal Plates - Spare</b> | Description | Cat. No.  | M.R.P. (₹) Per Unit |
|--------------------------------------------------------------------------------------------------------------------|-------------|-----------|---------------------|
|                                                                                                                    | Small       | HH2420122 | 32                  |
|                                                                                                                    | Large       | HH2420124 |                     |
|                                                                                                                    | Square      | HH2420123 |                     |

**Note :** Printing as per customer requirement

| <br><b>Fixing Device</b> | Cat. No. | M.R.P. (₹) Per Unit |
|-------------------------------------------------------------------------------------------------------------|----------|---------------------|
|                                                                                                             | HH192000 | 103                 |

| Plastic Plate                                                                       |                                               | Cat. No.  | M.R.P. (₹) Per Unit |
|-------------------------------------------------------------------------------------|-----------------------------------------------|-----------|---------------------|
|  | Yellow legend plate                           | HB135000  | 87                  |
|  | Padlock Yellow (for Mushroom head Actuator)   | HF192024  | 215                 |
|                                                                                     | Padlock Transparent (for Flush head Actuator) | HF192025  | 195                 |
|  | Protecting Shroud for Emergency Push Button   | HF195020A | 100                 |
|                                                                                     | Protecting Shroud                             | HF195004  | 87                  |



| Shroud (Boot) for Actuator                                                                                              | Colour     | Gen Next Actuator |                     |
|-------------------------------------------------------------------------------------------------------------------------|------------|-------------------|---------------------|
|                                                                                                                         |            | Cat. No.          | M.R.P. (₹) Per Unit |
| <br>(For IP67 protection of actuators) | White      | HB17101           | 40                  |
|                                                                                                                         | Red        | HB17301           |                     |
|                                                                                                                         | Green      | HB17401           |                     |
|                                                                                                                         | Black      | NA                |                     |
|                                                                                                                         | Yellow     | HB17501           |                     |
|                                                                                                                         | Blue       | HB17701           |                     |
|                                                                                                                         | Amber      | HB17801           |                     |
|                                                                                                                         | Colourless | HB190003          | 49                  |

| Spare Lens Cap                                                                    | Colour     | Cat. No.        |             | M.R.P. (₹) Per Unit |
|-----------------------------------------------------------------------------------|------------|-----------------|-------------|---------------------|
|                                                                                   |            | Non Illuminated | Illuminated |                     |
|  | Red        | HB103002        | HB103103    | 31                  |
|                                                                                   | Green      | HB104000        | HB104101    |                     |
|                                                                                   | Black      | HB102006        | NA          |                     |
|                                                                                   | Yellow     | HB105008        | HB105109    |                     |
|                                                                                   | White/Opal | HB101004        | HB101105    |                     |
|                                                                                   | Blue       | HB107010        | HB107111    |                     |
|                                                                                   | Orange     | HB108012        | HB108113    |                     |
|                                                                                   | Colourless | NA              | HB100107    |                     |

**Note :** It can be used for Gen Next.

| Collar<br>(For Flush/<br>Projecting Head)                         |  | Cat. No. | Colour              | M.R.P. (₹) Per Unit |
|-------------------------------------------------------------------|-------------------------------------------------------------------------------------|----------|---------------------|---------------------|
|                                                                   |                                                                                     | HB196000 | Chrome Plated 'ABS' | 26                  |
|                                                                   |                                                                                     | HB192000 | Black               | 26                  |
|                                                                   |                                                                                     | HB326000 | Brass               | 85                  |
| Adaptor Ring *<br>(For 30 to 22 mm in<br>Panel Cutout conversion) |  | HH180000 | Gray                | 37                  |
|                                                                   |                                                                                     | HH182004 | Black               |                     |
|                                                                   |                                                                                     | HH196006 | Chrome Plated 'ABS' |                     |
| Blanking Plugs                                                    |  | HH180002 | Gray                | 72                  |
|                                                                   |                                                                                     | HH182009 | Black               |                     |
|                                                                   |                                                                                     | HH196010 | Chrome Plated 'ABS' |                     |
| Center Indication Strip<br>(For Twin Touch Actuator)              |  | HB102058 | Black               | 72                  |
|                                                                   |                                                                                     | HB105163 | Yellow              |                     |
|                                                                   |                                                                                     | HB108169 | Orange              |                     |
|                                                                   |                                                                                     | HB100161 | Colourless          |                     |

\* It can be used to convert Gen Next actuator series to TK3 Ø30 mm mounting.

Every effort as to the correctness or sufficiency of the information and data contained in the catalogue is made. We however cannot accept any liability for the accuracy or completeness of the information and data provided. No claims in this regard shall consequently be accepted.

We reserve the right to make changes, without prior notice, in the catalogue.

Products with CAT no. having, with or without, dot as suffix are same.

These products are manufactured by



## General Terms

All prices are on Maximum retail price basis inclusive of all duties, GST & any other tax as applicable.

## Warranty Policy

All products listed in the price list are covered by a warranty against manufacturing defects for a period of 18\* months from the date of purchase. For Lauritz Knudsen MCBs & Isolators mounted inside Lauritz Knudsen Distribution Boards, an extended warranty of 5 years is provided.

In the event of a defect due to faulty workmanship or other associated reasons, we will, at our discretion, remedy the defect or replace the faulty parts or the entire product as soon as possible, free of cost.

However, the warranty is subject to proper usage, efficient maintenance, and does not cover defects arising from fire, accidents, inefficient maintenance, faulty operation, or deliberate or accidental damage. It also does not cover damage to power electronic components such as thyristors & IGBTs, which primarily fail due to overtemperature & over-voltage. Users need to take adequate precautions to eliminate these conditions. Manufacturer shall not be responsible & liable for any special, incidental, social or consequential (including lost profits) loss, consequential damages, injury or damages (punitive) of any kind solely attributable to defect or failure of its products. Manufacturer shall not be liable in any manner for the issue of or failure in the performance of other equipment the product is attached to.

## Comprehensive Service Support

Lauritz Knudsen Electrical & Automation has over seven decades of experience in providing after sales service for low voltage distribution system in every type of industry & commercial complex in India

Lauritz Knudsen Electrical & Automation offers the following services, partnering you in your maintenance of low voltage distribution products:

- › Regular Maintenance
- › Preventive Maintenance Programme
- › On Call
- › Annual Maintenance Contract
- › Product Support for Managing Obsolescence-

## Switchgear Training Centres



### Pune

Lauritz Knudsen Electrical & Automation  
Switchgear Training Centre  
T-156 / 157, MIDC,  
Bhosari, Pune - 411 026  
Tel: 020-2712 0037 / 2712 0653  
E-mail: STC-PUNE@LK-EA.com



### Lucknow

Lauritz Knudsen Electrical & Automation  
Switchgear Training Centre  
C-6 & 7, UPSIDC,  
P. O. Sarojininagar,  
Lucknow - 226 008  
Tel: 97944 54455  
E-mail: STC-LUCKNOW@LK-EA.com



### Delhi

Lauritz Knudsen Electrical & Automation  
Switchgear Training Centre  
A-25, Imperia Complex, First Floor  
Mohan Cooperative Industrial Estate  
Near Sarita Vihar / Mohan Estate Metro Station  
Main Mathura Road, New Delhi - 110044  
Tel: 9899020306 / 9720186726 / 9560845094  
E-mail: STC-DELHI@LK-EA.com



### Kolkata

Lauritz Knudsen Electrical & Automation  
Switchgear Training Centre,  
2nd Floor, Block BN3, Sector V,  
Salt Lake City,  
Kolkata - 700091, West Bengal  
Tel: 7738717893 / 7797795567  
E-mail: STC-KOLKATA@LK-EA.com



### Vadodara

Lauritz Knudsen Electrical & Automation  
Switchgear Training Centre  
Behind L&T Knowledge City,  
Near Village Ankhol,  
Vadodara - 390019  
Tel: 0265 6147805 / 6147808  
E-mail: STC-VADODARA@LK-EA.com



### Coonor

Lauritz Knudsen Electrical & Automation  
Switchgear Training Centre  
Ooty-Coonoor Main Road  
Yellanahalli P.O.,  
The Nilgiris - 643 243  
Tel: 0423 251 7107  
E-mail: STC-COONOOR@LK-EA.com

# Electrical Standard Products (ESP) Offices

## HEAD OFFICE

Lauritz Knudsen Electrical & Automation, A/600, Shil-Mahape Road, TTC Industrial Area, MIDC Thane, Navi Mumbai, 400 710, Maharashtra.

Tel: 022-6722 6300 | Fax: 022-6705 1112 | e-mail: CIC@LK-EA.com

## BRANCH OFFICES

Lauritz Knudsen Electrical & Automation  
C-201, The First Commercial Complex,  
B/S Keshavbaug Party Plot, Vastrapur,  
**Ahmedabad - 380 015**  
Phone No: 022-6932 7800  
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation  
Shri Daneshwari, 1st Floor,  
Plot No. 17, 2nd Cross, Near Old Income  
Tax Office Road, Vidyanagar,  
**Hubballi - 580 021**  
Phone No: 022-6932 7800  
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation  
No.10, Fortuna Towers, 2nd Floor,  
Rana Pratap Marg, Near NBRI,  
**Lucknow - 226 001**  
Phone No: 022-6932 7800  
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation  
A06/A07, Second Floor,  
Grand Chandra Complex, Frazer Road  
**Patna - 800 001**  
Phone No: 022-6932 7800  
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation  
Wework Central, #36 Infantry Road,  
**Bengaluru - 560 001**  
Phone No: 022-6932 7800  
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation  
AWFIS Space Solutions, Prestige Phoenix,  
4th floor, 1405, Umanagar, Begumpet,  
**Hyderabad - 500 016**  
Phone No: 022-6932 7800  
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation  
El Dorado Building, 3rd Floor, 6,  
Venkatraman Street, Chinna Chokkikulam,  
**Madurai - 625 002**  
Phone No: 022-6932 7800  
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation  
UrbanWrk, 5th Floor, Sai Radhe,  
Raja Bahadur Mill Road, Behind Hotel  
Grand Sheraton, Sangamwadi  
**Pune - 411 001**  
Phone No: 022-6932 7800  
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation  
Work loop Unit-612, 6th Floor,  
Esplanade One, Rasulgah,  
**Bhubaneswar - 751 010**  
Phone No: 022-6932 7800  
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation  
Workie, 214 - 2nd Floor,  
Apollo Premier, PU-4,  
Scheme No. 54, Vijay Nagar Square,  
**Indore - 452 010**  
Phone No: 022-6932 7800  
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation  
Bestech Business Park,  
Tower - A, 2nd floor, Sector - 66  
**Mohali - 160059**  
Phone No: 022-6932 7800  
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation  
Office No. 211 & 212, Pithalia Plaza,  
KK Road, Near Fafadih Chowk,  
**Raipur - 492 001**  
Phone No: 022-6932 7800  
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation  
801 Word Level-8, No. 28,  
SIDCO Industrial Estate, Guindy,  
**Chennai - 600 032**  
Phone No: 022-6932 7800  
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation  
Office No. 430, 4th Floor,  
Jaipur Electronic Market, Riddhi Siddhi,  
Gopalpura Bypass,  
**Jaipur - 302 018**  
Phone No: 022-6932 7800  
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation  
TC II, Tower B, PRIMA BAY Gate No. 5,  
Saki Vihar Road Powai,  
**Mumbai - 400 072**  
Phone No: 022-6932 7800  
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation  
DevX 4th Floor, A Wing, Om 9 Square,  
150 Ft Ring Road, Near Nana Mava Circle,  
Opp Silver Heights,  
**Rajkot - 360 001**  
Phone No: 022-6932 7800  
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation  
Playworkz Coworking Space  
43 & 44, 3rd Cross,  
Bharathy Colony, Peelamedu,  
**Coimbatore - 641 004**  
Phone No: 022-6932 7800  
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation  
GDR Siddha, Ground Floor, N Road  
Bistupur, Opposite St. Mary's Church,  
**Jamshedpur - 831 001**  
Phone No: 022-6932 7800  
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation  
Unnati Building, 2nd Floor,  
Automation Campus, A-600, TTC Industrial  
Area Shil-Mahape Road, Mahape,  
**Navi Mumbai - 400 710**  
Phone No: 022-6932 7800  
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation  
10th Floor, Titanium Business,  
Bhimrad Road, Althan  
**Surat - 395 017**  
Phone No: 022-6932 7800  
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation  
3rd Floor, 1&2 Vijay Park,  
Main Chakrata Road, Opp. Anandam,  
Near Ballapur chowk,  
**Dehradun - 248 001**  
Phone No: 022-6932 7800  
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation  
Business Communication Centre  
2nd Floor, Chiramel Chambers,  
Kurisupally Road, Ravipuram,  
**Kochi - 682 015**  
Phone No: 022-6932 7800  
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation  
M1 & M2, Mezzanine Floor,  
Himalaya Excellency,  
Plot No. C-47, Pratap Nagar Square,  
**Nagpur - 440 022**  
Phone No: 022-6932 7800  
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation  
11th Floor, Block-D, Notus IT Park,  
Sarabhai Campus, Bhailal Amin Marg,  
**Vadodara - 390 023**  
Phone No: 022-6932 7800  
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation  
Ground Floor, B-27,  
Biplab Rashbihari Sarani,  
Sector 2A, Bidhan Nagar,  
**Durgapur - 713 212**  
Phone No: 022-6932 7800  
e-mail: CIC@LK-EA.com

Lauritz & Knudsen Electrical & Automation  
207, 2nd floor, Revolution Complex,  
Station Road, E Ward,  
Next to Pedestrian Bridge,  
**Kolhapur - 416 001**  
Phone No: 022-6932 7800  
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation  
2nd Floor, Samarth House,  
Opposite Titan World,  
Samarth Nagar, Mahatma Nagar,  
**Nasik - 422 005**  
Phone No: 022-6932 7800  
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation  
Qubexpro Business Centre,  
4th Floor, V Mall, Above Lifestyles,  
Facor Layout, Waltair Uplands,  
**Visakhapatnam - 530 003**  
Phone No: 022-6932 7800  
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation  
6th Floor, Exotica Greens, A Block, 191,  
R G Baruah Road, Guwahati Central,  
**Guwahati - 781 005**  
Phone No: 022-6932 7800  
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation  
2nd Floor, BN3, Salt Lake, Sector-V,  
**Kolkata - 700 091**  
Phone No: 022-6932 7800  
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation  
A-25, 1st Floor, Imperia Complex,  
Mohan Corporate Industrial Estate,  
Near Sarita Vihar Metro Station,  
Mathura Road,  
**New Delhi - 110 044**  
Phone no: 022-6932 7800  
e-mail: CIC@LK-EA.com

Product improvement is a continuous process. For the latest information and special application, please contact any of our offices listed here. Product photographs shown for representative purpose only.



### Lauritz Knudsen Electrical & Automation, Electrical Standard Product

A/600, Shil-Mahape Road, TTC Industrial Area, MIDC Thane, Navi Mumbai, 400 710, Maharashtra, Phone No: 022-6722 6300 | Web: www.LK-EA.com

### Customer Interaction Center (CIC)

Phone no: 022-6932 7800

Web: www.LK-EA.com | e-mail: CIC@LK-EA.com

Kumar Electric & Engineering Company  
Plot No16,  
Royal Hotel,Nr Sheetal Motors, Sarkhej,  
B/H Trivedi Brother's Petrol Pump  
Ahmedabad 382210, Gujarat  
India  
Phone No - 07926742080  
Email - keec2001@yahoo.com